


Aluminium column SAL DP-707M

180 mm at the base plate

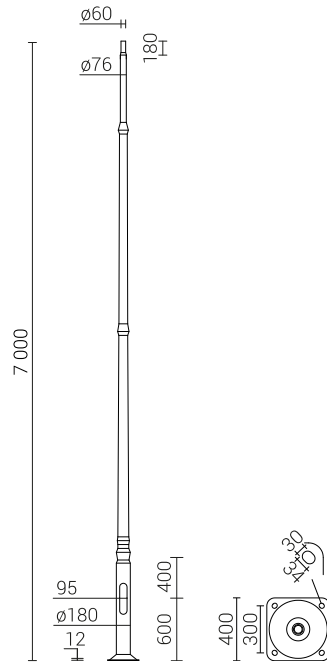

TECHNICAL DATA

Anodising	10 colours
Luminaire mounting	directly on the column, luminaires with mounting $\varnothing 60$ mm with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet
Extension arm type	according to resistance calculations
Packing	sleeve material
Performance under vehicle impact (passive safety)	50-NE-C-S-SE-MD-0, 70-NE-C-S-SE-MD-0, 100-NE-C-S-SE-MD-0
Diameter at the base plate	180 mm
Finish	brushed anodised aluminium - anode coating thickness is $20\mu\text{m}$ as standard (coating thickness of $25\mu\text{m}$ is also possible), option of elastomer protection in column's colour up to a height of 350 mm (other height on customer's request) - the thickness of the protective coating ranges from 0.8 mm to 1.2 mm
Diameter of the column ending	$\varnothing 60 \times 180$ mm adapted to the installation of ROSA extension arms (with the effect of a facing head) and ROSA luminaires (according to the assembly parameter included in the luminaire technical data sheet)



TABLE OF VARIANTS

Code	Symbol	Height of the column [H]	Wall thickness	Unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners	Net weight
42973/C...	SAL DP-707M	7 m	4.2 mm	0.46 m³	B-71, B-70 / Z-71, Z-70	311171, 311170 / 311271, 311207	4012	38.5 kg

STRENGTH TABLE

SAL DP-707M		Acceptable windage of single luminaire [m^2] for $C_x=1$			
code 42973		Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s
Extension arm type	Permissible weight of a single luminaire	I zone, II Field category up to	I & III zone, II Field category up to 450m by s.I	II zone, II Field category up to	III zone, II Field category up to 755m by s.I
-	50	1,12	0,92	0,75	0,65
WA-17/1	10	0,66	0,51	0,38	0,30
WA-17/1 fi60	15	0,64	0,49	0,36	0,29
WA-20/1	10	0,69	0,54	0,41	0,33
WA-20/2	10	0,28	0,19	0,11	0,06
WA-20/1 fi60	15	0,67	0,52	0,39	0,31
WA-20/2 fi60	12,5	0,27	0,18	0,10	0,05
WR-23/1/0,76 fi42	15	0,73	0,58	0,45	0,38
WR-23/1/0,76	15	0,73	0,58	0,45	0,37
WR-71/1/1,2	15	0,63	0,50	0,39	0,32
WR-71/2/1,2	15	0,36	0,26	0,18	0,13

Aluminium column SAL DP-707M

180 mm at the base plate



ANODISING COLOURS

