


Aluminium bollard SAL1,5 CYL100-DZ

100 mm at the ground

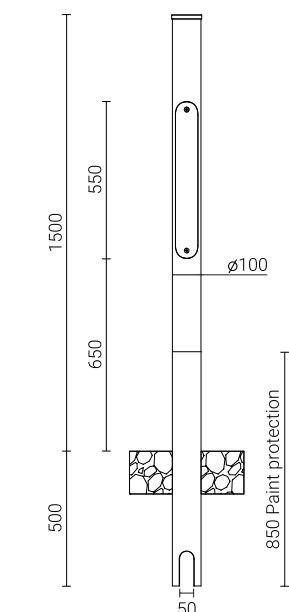

TECHNICAL DATA

Anodising	10 colours
Packing	sleeve material
Diameter at the base plate	100 mm
Finish	shot blasted anodised aluminium - anode coating thickness is 20µm as standard (coating thickness of 25µm is also possible), elastomer protection in column's colour up to a height of 350 mm (other height on customer's request)
Ingress protection	IP54 for wire chamber




TABLE OF VARIANTS

Code	Code	Symbol	Height of the column [H]	Wall thickness	Unit volume	Net weight
42872	42872/C...	SAL1,5 CYL100-dz	1.5 m	2.7 mm	0.017 m³	4.9 kg

ANODISING COLOURS

