


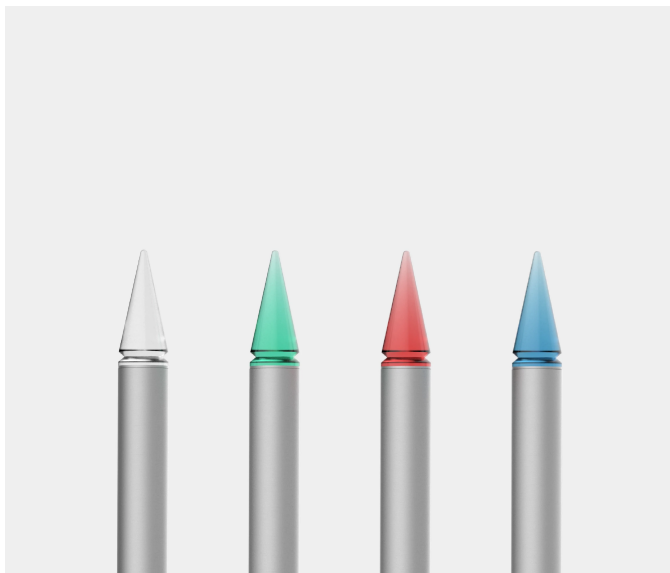


TECHNICAL DATA

Assembly	with 3 screws M6, after preparing mounting holes in the column
Application	aluminium columns with spigot endings Ø60 i Ø76 mm
Colour	Blue, Green, Red, White
Ingress protection	IP 65 or IP 44 (after mounting on the column)
Material	PMMA (IP 44), HDPE (IP 65)
Input voltage frequency	50/60Hz


TABLE OF VARIANTS

Code	Symbol	LED power	Luminaire power consumption	Colour	Ingress protection	Mounting diameter	Net weight
40530	Small light spike	6 W	8.5 W	• White	IP 65	76 mm	0.6 kg
40520	Small light spike	6 W	8.5 W	• Red	IP 65	76 mm	0.6 kg
40510	Small light spike	6 W	8.5 W	• Green	IP 65	76 mm	0.6 kg
40500	Small light spike	6 W	8.5 W	• Blue	IP 65	76 mm	0.6 kg
4053	Small light spike	1 W	1.2 W	• White	IP 44	76 mm	0.5 kg
4052	Small light spike	1 W	1.2 W	• Red	IP 44	76 mm	0.5 kg
4051	Small light spike	1 W	1.2 W	• Green	IP 44	76 mm	0.5 kg
4050	Small light spike	1 W	1.2 W	• Blue	IP 44	76 mm	0.5 kg
4037	Small light spike	1 W	1.2 W	• White	IP 44	60 mm	0.5 kg
4036	Small light spike	1 W	1.2 W	• Red	IP 44	60 mm	0.5 kg
4035	Small light spike	1 W	1.2 W	• Green	IP 44	60 mm	0.5 kg
4034	Small light spike	1 W	1.2 W	• Blue	IP 44	60 mm	0.5 kg

IP44

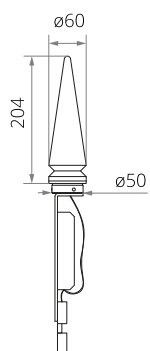

IP44

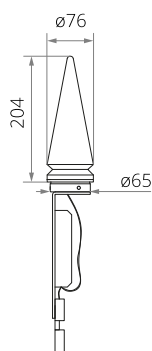

IP65

