



TECHNICAL DATA

Application	urban roads, residential roads (internal), parks, pedestrians, parkings
Assembly	on extension arms, wall brackets, columns with extension arms with $\varnothing$ 42 x 40 mm ending
Colour	black
Ingress protection	IP 66
Material	body and cap – anodised aluminium formed sheet metal
Unit volume	0.16 m ³
Operating temperature range	from -40°C to +55°C
Expected useful lifetime	L90B10 - 100 000 h
CRI	>70
Inrush current	21 A / 225 μ s (OW LED 24 -36), 43A / 260 μ s (OW LED 48 - 72)
Input voltage frequency	50/60Hz
Power factor	$\geq$ 0.95
Number of LED	24
Control system	Luminaire has the possibility to connect to an external control system via DALI interface (optionally via analog signal 1- 10V).

Code	Symbol	LED power	Luminaire power consumption	LED forward current	Colour temperature (CCT)	LEDs luminous flux ¹	Luminaire luminous flux ¹	Luminous efficacy ¹	Net weight
2109034/4/... ²	OW LED 60	60 W	67 W	830 mA	4000 K	10450 lm	9150 lm	137 lm/W	5.1 kg

1) tolerance +/- 5% due to LEDs accuracy
2) symbol of chosen optical system eg. 2109033/6/T2 is OW LED 48 5000K with T2 optical system

DIRECTIVES AND STANDARDS

DIRECTIVES: 2014/35/UE (Official Journal of the UE L 96/357 29.03.2014), 2014/30/UE (Official Journal of the UE L 96/79 29.03.2014), 2011/65/UE RoHS (Official Journal of the UE L 174/88 01.07.2011), 2009/125/EC(Official Journal of the UE L 285/10 31.10.2009)
STANDARDS: PN-EN IEC 60598-1: 2021-7, PN-EN 60598-2-3: 2006, PN-EN 60529: 2003, PN-EN 62262: 2003, PN-EN 62471:2010, PN-EN 55015: 2019, PN-EN 61547: 2009, PN-EN 61000-3-2: 2019 , PN-EN 61000-3-3: 2014


Lighting parameters presented based on laboratory tests according to IESNA LM-79-19

REMOVING ELECTROSTATIC CHARGE FROM LED LUMINAIRE BODY


In order to efficient discharge the electrostatic charge from the housing of LED fitting installed on the pole from dielectric material (non-conductive) one of the following solutions is required:
- functional grounding
- LED luminaire with an additional protection device

TECHNICAL DRAWING


OW LED




OPTIONAL VERSION
OW LED WITH DIFFUSER

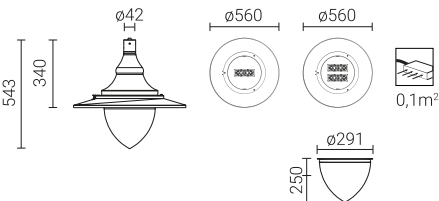


T4




PP




SP




T3




T2




VS




DW



ME



PL



POWER SYSTEM FUNCTIONS

Luminaire in standard has following functions of intelligent power supply:

- Connection to outside control system by DALI interface (operation of analog signal 1-10V as an option),
- Possibility of programming multistage dimming of luminaire, up to 5 intervals in the range of from 10 to 100% of nominal power,
- LED module equipped with thermal protection implemented via an NTC thermistor,
- Regulation of power / luminous flux – the option of setting another value than the catalogue in the range of 30-100% of nominal one,

ACCETABLE QUANTITY OF LUMINAIRES ON ONE CIRCUIT

Overcurrent switches MCB type B or C

Luminaire	Typ	2A	4A	6A	10A	16A	20A	25A
OW LED 24, 36W	B	3	6	10	16	26	32	40
	C	3	10	16	27	44	54	67
OW LED 48, 60, 72W	B	1	2	4	6	11	12	15
	C	1	4	6	10	17	20	26


Fuse – type gG and GL

Luminaire	2A	4A	6A	10A	16A	20A	25A
OW LED 24, 36W	1	10	19	25	50	68	97
OW LED 48, 60, 72W	0	4	8	11	22	31	44

OW LED 60



OW LED LUMINAIRE DIFFUSER

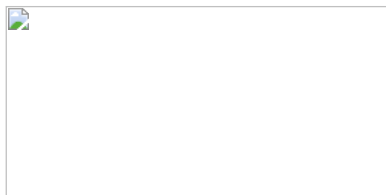

Code	Name	Unit volume	Weight
690893	Transparent diffuser (PMMA) for OW LED luminaire	0,02m ³	0,55kg
690898	Frosted diffuser (PMMA) for OW LED luminaire	0,02m ³	0,55kg