


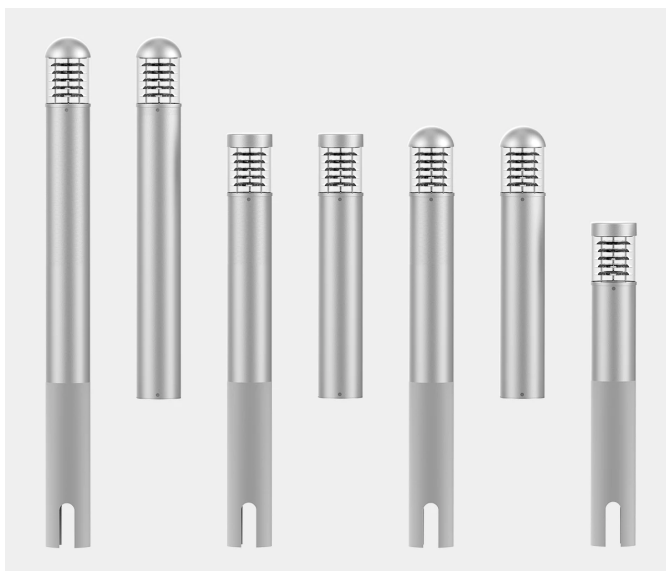

TECHNICAL DATA

Anodising	10 colours
Packing	bubble wrap
Application	parks, pedestrians
Finish	grinded, anodised aluminium - anode coating thickness is 20µm as standard (coating thickness of 25µm is also possible), option of elastomer protection in the colour of the column up to the height of 50 mm (other height on customer's request) - the thickness of the protective coating ranges from 0.8 mm to 1.2 mm
Ingress protection	IP 65
Material	aluminium alloy tube, transparent cylindrical PMMA diffuser
Input voltage frequency	50 Hz
Supply voltage	230V AC
Electrical gear cover	mounted on gear frame, magnetic ballast with thermal protection, metal halide lamps MH 70W (EL) optionally available with electronic ballast
Types of bollards	on concrete footing and rooted (marked "dz" in the name) with round and flat cap (marked .../P in the product code)
	-




TABLE OF VARIANTS

Code	Symbol	Height of the column [H]	Unit volume	Concrete footing / reinforcement basket type	Light source type	Net weight	Cap
45038/C...	SAP 900 S-70W	945 mm	0.023 m³	B-0, B-0A / Z-0, Z-0A	S-70W	5.55 kg	round
45039/C...	SAP 900 MH-70W	945 mm	0.023 m³	B-0, B-0A / Z-0, Z-0A	MH-70W	5.65 kg	round
45038/C.../P	SAP 900 S-70W	915 mm	0.023 m³	B-0, B-0A / Z-0, Z-0A	S-70W	5.55 kg	flat
45039/C.../P	SAP 900 MH-70W	915 mm	0.023 m³	B-0, B-0A / Z-0, Z-0A	MH-70W	5.65 kg	flat
45096/C...	SAP 900 dz S-70W	945 mm	0.036 m³	-	S-70W	6.75 kg	round
45097/C...	SAP 900 dz MH-70W	945 mm	0.036 m³	-	MH-70W	6.75 kg	round
45096/C.../P	SAP 900 dz S-70W	915 mm	0.036 m³	-	S-70W	6.75 kg	flat
45097/C.../P	SAP 900 dz MH-70W	915 mm	0.036 m³	-	MH-70W	6.75 kg	flat
45045/C...	SAP 1200 S-70W	1 245 mm	0.031 m³	B-0A / Z-0A	S-70W	6.55 kg	round
45046/C...	SAP 1200 MH-70W	1 245 mm	0.031 m³	B-0A / Z-0A	MH-70W	6.55 kg	round
45103/C...	SAP 1200 dz S-70W	1 245 mm	0.043 m³	-	S-70W	7.75 kg	round
45104/C...	SAP 1200 dz MH-70W	1 245 mm	0.043 m³	-	MH-70W	7.75 kg	round
45103/C.../P	SAP 1200 dz S-70W	1 215 mm	0.043 m³	-	S-70W	7.75 kg	flat
45104/C.../P	SAP 1200 dz MH-70W	1 215 mm	0.043 m³	-	MH-70W	7.75 kg	flat
45052/C...	SAP 1200 W S-70W	1 245 mm	0.031 m³	B-0A / Z-0A	S-70W	6.75 kg	round
45053/C...	SAP 1200 W MH-70W	1 245 mm	0.031 m³	B-0A / Z-0A	MH-70W	6.75 kg	round
45052/C.../P	SAP 1200 W S-70W	1 215 mm	0.031 m³	B-0A / Z-0A	S-70W	6.75 kg	flat
45053/C.../P	SAP 1200 W MH-70W	1 215 mm	0.031 m³	B-0A / Z-0A	MH-70W	6.75 kg	flat
45110/C...	SAP 1200 W dz S-70W	1 245 mm	0.043 m³	-	S-70W	8.15 kg	round
45111/C...	SAP 1200 W dz MH-70W	1 245 mm	0.043 m³	-	MH-70W	8.15 kg	round
45110/C.../P	SAP 1200 W dz S-70W	1 215 mm	0.043 m³	-	S-70W	8.15 kg	flat
45111/C.../P	SAP 1200 W dz MH-70W	1 215 mm	0.043 m³	-	MH-70W	8.15 kg	flat
45108/C...	SAP 1200 dz E/Z	1 245 mm	0.043 m³	-	LED E-27	6.45 kg	round
45115/C.../P	SAP 1200 W dz E/Z	1 215 mm	0.043 m³	-	compact fluorescent lamp E-27	6.75 kg	flat
45115/C...	SAP 1200 W dz E/Z	1 245 mm	0.043 m³	-	compact fluorescent lamp E-27	6.75 kg	round
45056/C.../P	SAP 1200 W E/Z	1 215 mm	0.031 m³	B-0A / Z-0A	compact fluorescent lamp E-27	5.35 kg	flat
45056/C...	SAP 1200 W E/Z	1 245 mm	0.031 m³	B-0A / Z-0A	compact fluorescent lamp E-27	5.35 kg	round
45108/C.../P	SAP 1200 dz E/Z	1 215 mm	0.043 m³	-	compact fluorescent lamp E-27	6.45 kg	flat
45050/C.../P	SAP 1200 E/Z	1 215 mm	0.031 m³	B-0A / Z-0A	compact fluorescent lamp E-27	5.15 kg	flat
45046/C.../P	SAP 1200 MH-70W	1 215 mm	0.031 m³	B-0A / Z-0A	MH-70W	6.55 kg	flat
45045/C.../P	SAP 1200 S-70W	1 215 mm	0.031 m³	B-0A / Z-0A	S-70W	6.55 kg	flat
45050/C...	SAP 1200 E/Z	1 245 mm	0.031 m³	B-0A / Z-0A	compact fluorescent lamp E-27	5.15 kg	round

45101/C.../P	SAP 900 dz E/Z	915 mm	0.036 m³	-	compact fluorescent lamp E-27	5.35 kg	flat
45101/C...	SAP 900 dz E/Z	945 mm	0.036 m³	-	compact fluorescent lamp E-27	5.35 kg	round
45043/C.../P	SAP 900 E/Z	915 mm	0.023 m³	B-0, B-0A / Z-0, Z-0A	compact fluorescent lamp E-27	4.45 kg	flat
45043/C...	SAP 900 E/Z	945 mm	0.023 m³	B-0, B-0A / Z-0, Z-0A	compact fluorescent lamp E-27	4.45 kg	round

: 2014/35/UE (Official Journal of the UE L 96/357 29.03.2014), 2014/30/UE (Official Journal of the UE L 96/79 29.03.2014), 2011/65/UE RoHS (Official Journal of the UE L 174/88 01.07.2011), 2009/125/EC(Official Journal of the UE L 285/10 31.10.2009)
: PN-EN IEC 60598-1: 2021-7, PN-EN 60598-2-3: 2006, PN-EN 60529: 2003, PN-EN 62262: 2003, PN-EN 62471:2010, PN-EN 55015: 2019, PN-EN 61547: 2009, PN-EN 61000-3-2: 2019 , PN-EN 61000-3-3: 2014

Lighting parameters presented based on laboratory tests according to IESNA LM-79-19

TECHNICAL DRAWING

