




TECHNICAL DATA

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Assembly               | installed on the aluminium rail on the back wall of the column using two M6 bolts                                                                                                                                                                                                                                                                                                                                                |
| Ingress protection     | IP 54                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Material               | <p>integrated terminal strip – made of PTB material (butylene polyterephthalate), with high insulation parameters and high mechanical resistance;</p> <p>connection cover and clamp/cable protection – made of transparent polycarbonate;</p> <p>connection box base – made of polycarbonate, cable opening/outlets are protected with gaskets</p> <p>brass clamps and steel screws to connect the lower part with the cover</p> |
| Number of fuse-sockets | One fuse-socket mounted on L1 phase, there is a possibility of moving the fuse-socket on phase L2 or L3 by screwing-out two bolts                                                                                                                                                                                                                                                                                                |
| Description            | <p>5 tracks connection boxes for feeder cables with cross-section: 5 x 10 mm² to 5 x 25 mm² for Cu<br/>5 x 16 mm² to 5 x 35 mm² for Al</p> <p>Cross-section of output cables (for powering the luminaire)<br/>- one cable max. 3 x 2.5 mm²<br/>- max. 2 cables<br/>- the possibility of splitting load into particular phases<br/>- the possibility of moving the fuse-sockets</p>                                               |

| Code   | Symbol | Unit volume | Fuse sockets quantity | Protection class | Rated insulation voltage | Withstand stroke voltage rating | Rated current | Net weight |
|--------|--------|-------------|-----------------------|------------------|--------------------------|---------------------------------|---------------|------------|
| 324111 | NTB-11 | 0,002 m³    | 1                     | II               | 500V                     | 6 kV                            | 80A           | 0,9 kg     |

DIRECTIVES: 2014/35/UE (Official Journal of the UE L 96/357 29.03.2014), 2011/65/UE RoHS (Official Journal of the UE L 174/88 01.07.2011)  
STANDARDS: PN-EN 60529: 2003, PN-EN 50102: 2001, PN-EN 61439-1: 2011, PN-EN 61439-2: 2011

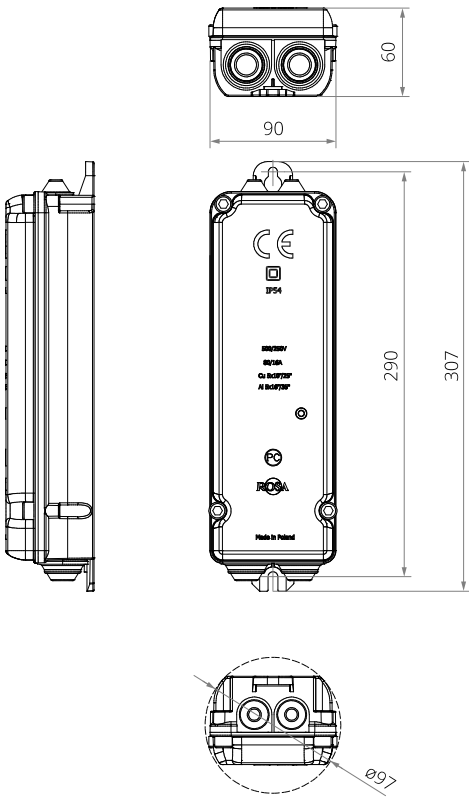

Fuse-link D01

| Fuse-link typej | Code   | Weight |
|-----------------|--------|--------|
| D01/E14 6A      | 322006 | 0,01kg |
| D01/E14 10A     | 322010 | 0.01kg |
| D01/E14 16A     | 322016 | 0.01kg |