




## TECHNICAL DATA

<b>Assembly</b>	on extension arms, wall brackets, columns with extension arms with $\varnothing$ 42 x 40 mm ending
<b>Application</b>	urban roads, residential roads (internal), parks, pedestrians, parkings
<b>Colour</b>	black
<b>Ingress protection</b>	IP 66
<b>Optical system</b>	PMMA optics, interchangeable LED module, tempered glass diffuser
<b>Material</b>	body and cap – anodised aluminium formed sheet metal
<b>Unit volume</b>	0,16 m <sup>3</sup>
<b>Operating temperature range</b>	from -40°C to +40°C
<b>Expected useful lifetime</b>	L90B10 - 100 000 h
<b>CRI</b>	>70
<b>Inrush current</b>	49A / 290 $\mu$ s
<b>Input voltage frequency</b>	50/60Hz
<b>Power factor</b>	$\geq$ 0.95
<b>Number of LED</b>	24
<b>Control system</b>	Luminaire can be connected to an external control system and / or sensors via socket compatible with Zhaga Book 18

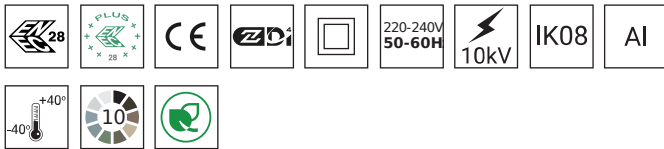

Code	Symbol	LED power	Luminaire power consumption	LED forward current	Colour temperature (CCT)	LEDs luminous flux <sup>1</sup>	Luminaire luminous flux <sup>1</sup>	Luminous efficacy <sup>1</sup>	Net weight
21080533/6/... <sup>2</sup>	OW+ LED D4i 48	48 W	55 W	700 mA	5000 K	9150 lm	7450 lm	135 lm/W	6.82 kg

1) tolerance +/- 5% due to LEDs accuracy

2) symbol of chosen optical system eg. 21080533/6/T2 is OW+ LED D4i 48 5000K with T2 optical system

## DIRECTIVES AND STANDARDS

**DIRECTIVES:** 2014/35/UE (Official Journal of the UE L 96/357 29.03.2014), 2014/30/UE (Official Journal of the UE L 96/79 29.03.2014), 2011/65/UE RoHS (Official Journal of the UE L 174/88 01.07.2011), 2009/125/EC (Official Journal of the UE L 285/10 31.10.2009)

**STANDARDS:** PN-EN IEC 60598-1: 2021-7, PN-EN 60598-2-3: 2006, PN-EN 60529: 2003, PN-EN 62262: 2003, PN-EN 62471:2010, PN-EN 55015: 2019, PN-EN 61547: 2009, PN-EN 61000-3-2: 2019, PN-EN 61000-3-3: 2014, PN-EN 62722-2-1 (tq=25°C)

Lighting parameters presented based on laboratory tests according to IESNA LM-79-19

## REMOVING ELECTROSTATIC CHARGE FROM LED LUMINAIRE BODY

In order to efficient discharge the electrostatic charge from the housing of LED fitting installed on the pole from dielectric material (non-conductive) one of the following solutions is required:

- functional grounding
- LED luminaire with an additional protection device













# OW+ LED D4I 48



## TECHNICAL DRAWING

OPTIONAL VERSION  
OW+ LED D4I WITH DIFFUSER

OW+ LED D4I

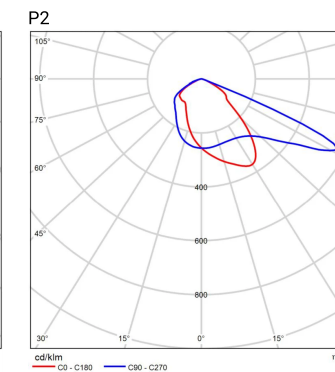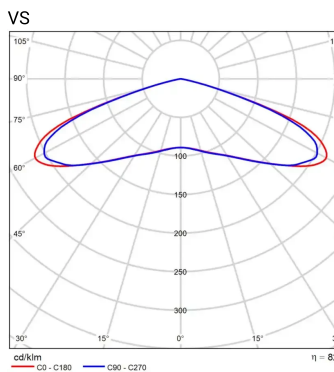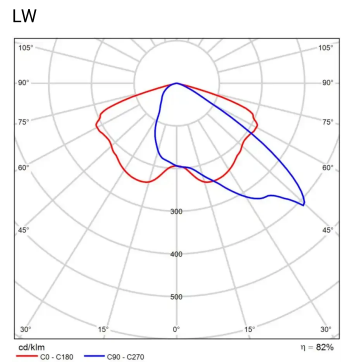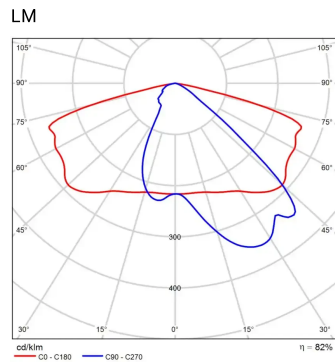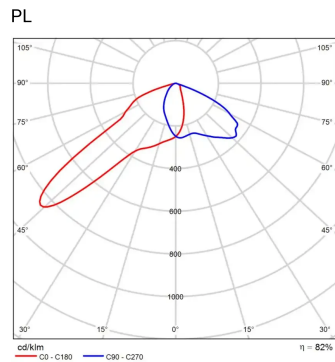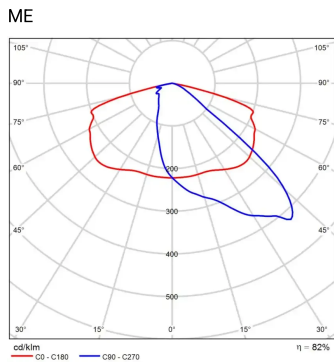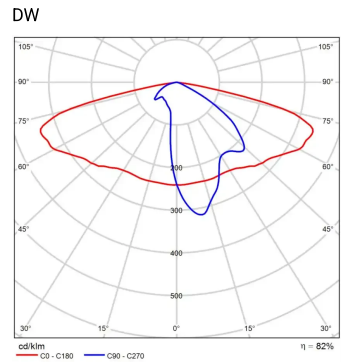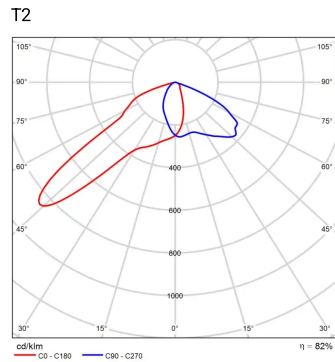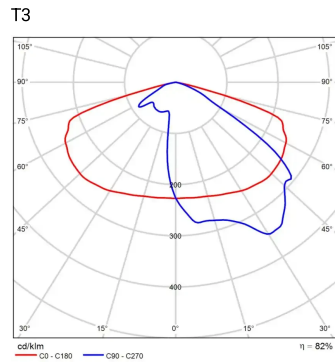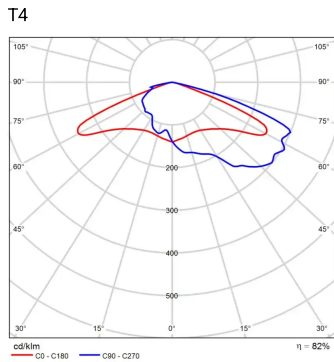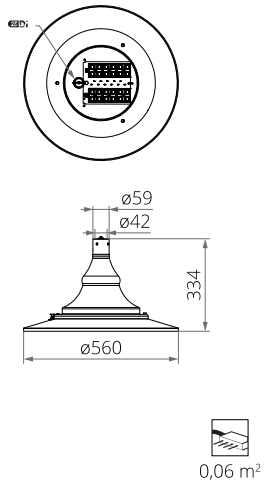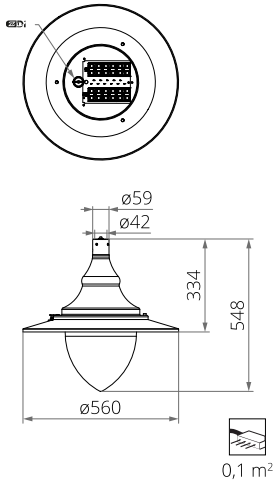

## POWER SYSTEM FUNCTIONS

### Luminaire in standard has following functions of intelligent power supply:

- Possibility of programming multistage dimming of luminaire, up to 5 intervals in the range of from 10 to 100% of nominal power,
- LED module equipped with thermal protection implemented via an NTC thermistor,
- Regulation of power / luminous flux – the option of setting another value than the catalogue in the range of 30-100% of nominal one,

## ACCEPTABLE QUANTITY OF LUMINAIRES ON ONE CIRCUIT

Overcurrent switches MCB type B or C

Luminaire	Type	2A	4A	6A	10A	16A	20A	25A
OW+ LED D4i	B	3	7	11	18	30	36	46
	C	3	7	11	18	30	36	46

Fuse – type gG and GL

Luminaire	2A	4A	6A	10A	16A	20A	25A
OW+ LED D4i	6	13	20	33	53	66	83

## CHROMATICITY

Chromaticity	x	y
2700K	0,4582	0,4099
3500K	0,4080	0,3916
4000K	0,3825	0,3798
5000K	0,3451	0,3554

## PHOTOMETRIC CODE

2700K	727/559
3500K	735/559
4000K	740/559
5000K	750/559

## OW LED LUMINAIRE DIFFUSER



Code	Name	Unit volume	Weight
<b>690893</b>	Transparent diffuser (PMMA) for OW LED luminaire	0,02m <sup>3</sup>	0,55kg
<b>690898</b>	Frosted diffuser (PMMA) for OW LED luminaire	0,02m <sup>3</sup>	0,55kg