


RING MINI 4 LED 24



TECHNICAL DATA

Anodising	10 colours
Application	surrounding office buildings, parks, pedestrians, parkings
Ingress protection	IP 66
Material	cap – brushed formed aluminium sheet, anodised; diffuser – tempered glass; base – anodised aluminium alloy; column – brushed anodised aluminium alloy;
Unit volume	0,08 m³ (RING MINI 3 LED) 0,103 m³ (RING MINI 4 LED) 0,125 m³ (RING MINI 5 LED)
Expected useful lifetime	L90B10 - 100 000 h
CRI	>80
Inrush current	18 A / 280 µs
Input voltage frequency	50/60Hz
Power factor	≥0.95
Number of LED	64
Control system	LED lighting set has the possibility to connect to an external control system via DALI interface (optionally via analog signal 1-10V).



Code	Symbol	Height of the column [H]	LED power	Luminaire power consumption	LED forward current	Colour temperature (CCT)	LEDs luminous flux¹	Luminaire luminous flux¹	Luminous efficacy¹	Net weight
21174030/1/...²/C...	RING MINI 4 LED 24	4 m	24 W	28 W	1025 mA	2700 K	3850 lm	2800 lm	100 lm/W	14.5 kg

1) tolerance +/- 5% due to LEDs accuracy

DIRECTIVES AND STANDARDS


DIRECTIVES: 2014/35/UE (Official Journal of the UE L 96/357 29.03.2014), 2014/30/UE (Official Journal of the UE L 96/79 29.03.2014), 2011/65/UE RoHS (Official Journal of the UE L 174/88 01.07.2011), 2009/125/EC(Official Journal of the UE L 285/10 31.10.2009)
STANDARDS: PN-EN IEC 60598-1: 2021-7, PN-EN 60598-2-3: 2006, PN-EN 60529: 2003, PN-EN 62262: 2003, PN-EN 62471:2010, PN-EN 55015: 2019, PN-EN 61547: 2009, PN-EN 61000-3-2: 2019 , PN-EN 61000-3-3: 2014

Lighting parameters presented based on laboratory tests according to IESNA LM-79-19


RING MINI 4 LED 24



TECHNICAL DRAWING

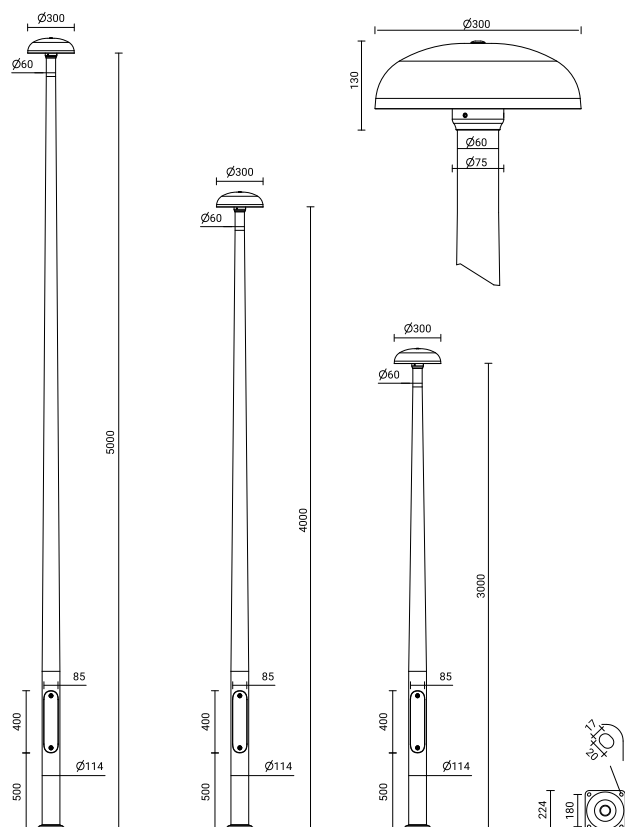

PHOTOMETRIC CURVES

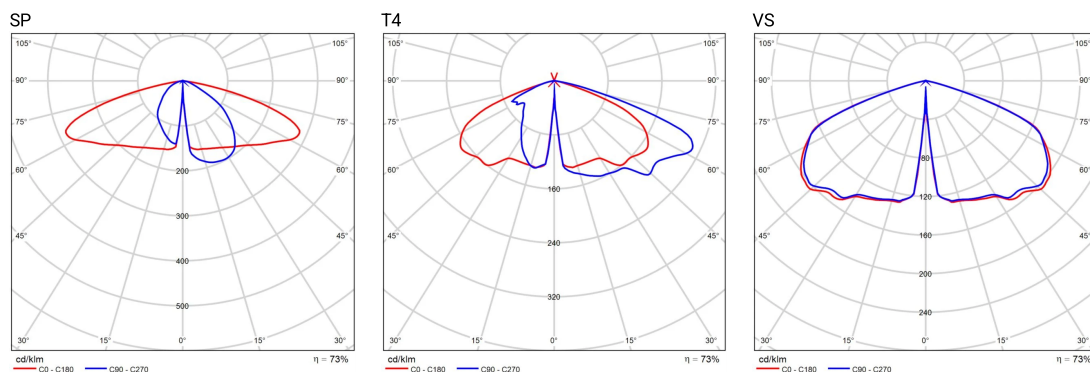

POWER SYSTEM FUNCTIONS

Luminaire in standard has following functions of intelligent power supply:

- Connection to outside control system by DALI interface (operation of analog signal 1-10V as an option),
- Possibility of programming multistage dimming of luminaire, up to 5 intervals in the range of from 10 to 100% of nominal power,
- LED module equipped with thermal protection implemented via an NTC thermistor,
- Regulation of power / luminous flux – the option of setting another value than the catalogue in the range of 30-100% of nominal one,

ACCETABLE QUANTITY OF LUMINAIRES ON ONE CIRCUIT

Overcurrent switches MCB type B or C

Lighting set	Type	2A	4A	6A	10A	16A	20A	25A
RING MINI LED	B	4	7	12	18	30	37	46
	C	4	12	18	31	51	62	75

Fuse – type gG and GL

Lighting set	2A	4A	6A	10A	16A	20A	25A
RING MINI LED	1	10	20	26	52	71	101

RING MINI 4 LED 24



ACCEPTABLE HEIGHT

RING MINI LED		Acceptable height of the LED lighting set		
Field category	I zone Vref. = 22 m/s	I & III zone, up to 450m a.s.l. Vref. = 24 m/s	II zone Vref. = 26 m/s	III zone up to 755m a.s.l. Vref. = 28 m/s
I	5	5	5	5
II	5	5	5	5
III	5	5	5	5
IV	5	5	5	5