


OPA-1 S-70W E27



TECHNICAL DATA

Power	70 W
Application	parks, pedestrians
Assembly	on columns, extension arms, anodised aluminium brackets with ø60x50 mm ending
Colour	Natural colour painted
Ingress protection	IP 65 for luminaire with diffuser
Material	base - die cast aluminium alloy, control gear cover – polycarbonate
Input voltage frequency	50 Hz
Supply voltage	230V AC
Electrical gear cover	mounted on gear frame, magnetic ballast with thermal protection, metal halide lamps MH 70W (EL) optionally available with electronic ballast
Mounting method	only upwards
Light source type	sodium E-27
Type of luminaires	-

Code	Symbol	Unit volume	Light source type	Lamp diffuser neck	Type of diffuser	Net weight
211702	OPA-1 S-70W E27	0.01 m³	sodium E-27	150 mm	Auris, Auris Maxi, Auris I, Auris Maxi I, Atlantis, Sphere Ø400	2.9 kg


: 2014/35/UE (Official Journal of the UE L 96/357 29.03.2014), 2014/30/UE (Official Journal of the UE L 96/79 29.03.2014), 2011/65/UE RoHS (Official Journal of the UE L 174/88 01.07.2011), 2009/125/EC(Official Journal of the UE L 285/10 31.10.2009)
: PN-EN IEC 60598-1: 2021-7, PN-EN 60598-2-3: 2006, PN-EN 60529: 2003, PN-EN 62262: 2003, PN-EN 62471:2010, PN-EN 55015: 2019, PN-EN 61547: 2009, PN-EN 61000-3-2: 2019 , PN-EN 61000-3-3: 2014

Lighting parameters presented based on laboratory tests according to IESNA LM-79-19

OPA-1 S-70W E27



TECHNICAL DRAWING

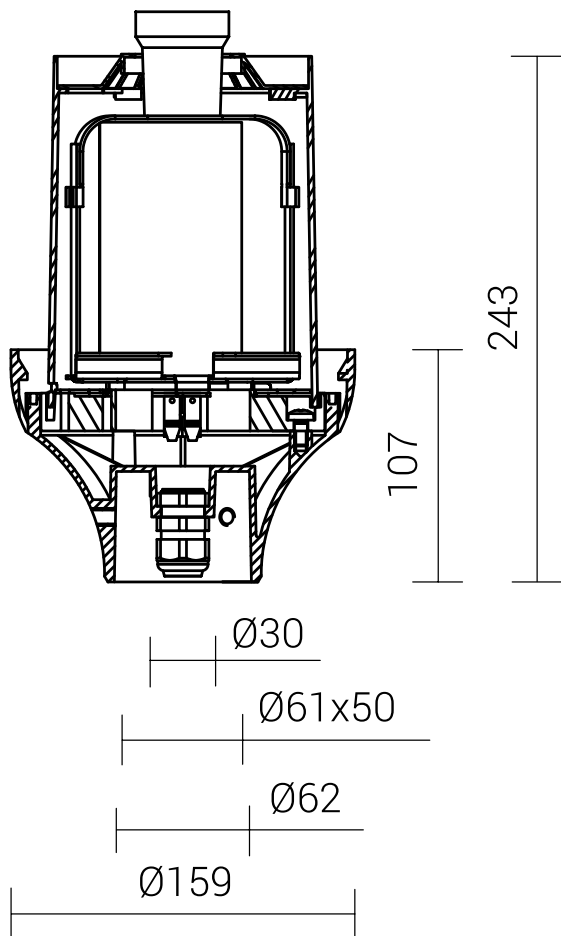

OPA-1 S-70 W

