



TECHNICAL DATA

Anodising	10 colours
Application	urban roads, residential roads (internal), surrounding office buildings, parks, pedestrians
Colour	inox / grey
Ingress protection	IP 66 for the optical part and the driver
Optical system	PMMA optics, interchangeable LED module
Material	anodised aluminium alloy
Unit volume	0,7 m³ (CUT-II-4 LED) 1 m³ (CUT-II-5 LED) 1,2 m³ (CUT-II-6 LED) 1,4 m³ (CUT-II-7 LED) 1,6 m³ (CUT-II-8 LED)
Expected useful lifetime	L90B10 - 100 000 h
CRI	>70
Inrush current	36 A / 280 µs (CUT-II-4 LED 12 - 36) 92 A / 250 µs (CUT-II-4 LED 48 - 72)
Input voltage frequency	50 - 60Hz
Power factor	≥0,95
Number of LED	2x12 (12 W, 24 W, 36 W), 2x24 (48 W, 72 W)
Control system	LED lighting set has the possibility to connect to an external control system via DALI interface (optionally via analog signal 1-10V).



TABLE OF VARIANTS

Code	Symbol	Height of the column [H]	LED power	Luminaire power consumption	LED forward current	Colour temperature (CCT)	LEDs luminous flux¹	Luminaire luminous flux¹	Luminous efficacy¹	Concrete footing / reinforcement basket type	Net weight
2106327/1/...²	CUT-II-4 LED 24	4 m	12 W x 2	14 W x 2	350 mA	2700 K	2250 lm x 2	2050 lm x 2	146 lm/W	B-50 / Z-50	44,5 kg
2106327/3/...²	CUT-II-4 LED 24	4 m	12 W x 2	14 W x 2	350 mA	3500 K	2400 lm x 2	2200 lm x 2	157 lm/W	B-50 / Z-50	44,5 kg
2106327/4/...²	CUT-II-4 LED 24	4 m	12 W x 2	14 W x 2	350 mA	4000 K	2550 lm x 2	2350 lm x 2	168 lm/W	B-50 / Z-50	44,5 kg
2106327/6/...²	CUT-II-4 LED 24	4 m	12 W x 2	14 W x 2	350 mA	5000 K	2550 lm x 2	2350 lm x 2	168 lm/W	B-50 / Z-50	44,5 kg
2106330/1/...²	CUT-II-4 LED 24	4 m	24 W x 2	28 W x 2	700 mA	2700 K	4050 lm x 2	3550 lm x 2	127 lm/W	B-50 / Z-50	44,5 kg
2106330/3/...²	CUT-II-4 LED 24	4 m	24 W x 2	28 W x 2	700 mA	3500 K	4350 lm x 2	3800 lm x 2	136 lm/W	B-50 / Z-50	44,5 kg
2106330/4/...²	CUT-II-4 LED 24	4 m	24 W x 2	28 W x 2	700 mA	4000 K	4550 lm x 2	4000 lm x 2	143 lm/W	B-50 / Z-50	44,5 kg
2106330/6/...²	CUT-II-4 LED 24	4 m	24 W x 2	28 W x 2	700 mA	5000 K	4550 lm x 2	4000 lm x 2	143 lm/W	B-50 / Z-50	44,5 kg
2106332/1/...²	CUT-II-4 LED 36	4 m	36 W x 2	40 W x 2	1000 mA	2700 K	5450 lm x 2	4800 lm x 2	120 lm/W	B-50 / Z-50	44,5 kg
2106332/3/...²	CUT-II-4 LED 36	4 m	36 W x 2	40 W x 2	1000 mA	3500 K	5800 lm x 2	5100 lm x 2	128 lm/W	B-50 / Z-50	44,5 kg
2106332/4/...²	CUT-II-4 LED 36	4 m	36 W x 2	40 W x 2	1000 mA	4000 K	6150 lm x 2	5400 lm x 2	135 lm/W	B-50 / Z-50	44,5 kg
2106332/6/...²	CUT-II-4 LED 36	4 m	36 W x 2	40 W x 2	1000 mA	5000 K	6150 lm x 2	5400 lm x 2	135 lm/W	B-50 / Z-50	44,5 kg
2106333/1/...²	CUT-II-4 LED 48	4 m	48 W x 2	55 W x 2	700 mA	2700 K	8150 lm x 2	7150 lm x 2	130 lm/W	B-50 / Z-50	44,5 kg
2106333/3/...²	CUT-II-4 LED 48	4 m	48 W x 2	55 W x 2	700 mA	3500 K	8650 lm x 2	7600 lm x 2	138 lm/W	B-50 / Z-50	44,5 kg
2106333/4/...²	CUT-II-4 LED 48	4 m	48 W x 2	55 W x 2	700 mA	4000 K	9150 lm x 2	8050 lm x 2	146 lm/W	B-50 / Z-50	44,5 kg
2106333/6/...²	CUT-II-4 LED 48	4 m	48 W x 2	55 W x 2	700 mA	5000 K	9150 lm x 2	8042 lm x 2	146 lm/W	B-50 / Z-50	44,5 kg
2106027/1/...²	CUT-II-5 LED 24	5 m	12 W x 2	14 W x 2	350 mA	2700 K	2250 lm x 2	2050 lm x 2	146 lm/W	B-50 / Z-50	50,5 kg
2106027/3/...²	CUT-II-5 LED 24	5 m	12 W x 2	14 W x 2	350 mA	3500 K	2400 lm x 2	2200 lm x 2	157 lm/W	B-50 / Z-50	50,5 kg
2106027/4/...²	CUT-II-5 LED 24	5 m	12 W x 2	14 W x 2	350 mA	4000 K	2550 lm x 2	2350 lm x 2	168 lm/W	B-50 / Z-50	50,5 kg
2106027/6/...²	CUT-II-5 LED 24	5 m	12 W x 2	14 W x 2	350 mA	5000 K	2550 lm x 2	2350 lm x 2	168 lm/W	B-50 / Z-50	50,5 kg
2106030/1/...²	CUT-II-5 LED 24	5 m	24 W x 2	28 W x 2	700 mA	2700 K	4050 lm x 2	3550 lm x 2	127 lm/W	B-50 / Z-50	50,5 kg
2106030/3/...²	CUT-II-5 LED 24	5 m	24 W x 2	28 W x 2	700 mA	3500 K	4350 lm x 2	3800 lm x 2	136 lm/W	B-50 / Z-50	50,5 kg
2106030/4/...²	CUT-II-5 LED 24	5 m	24 W x 2	28 W x 2	700 mA	4000 K	4550 lm x 2	4000 lm x 2	143 lm/W	B-50 / Z-50	50,5 kg
2106030/6/...²	CUT-II-5 LED 24	5 m	24 W x 2	28 W x 2	700 mA	5000 K	4550 lm x 2	4000 lm x 2	143 lm/W	B-50 / Z-50	50,5 kg
2106032/1/...²	CUT-II-5 LED 36	5 m	36 W x 2	40 W x 2	1000 mA	2700 K	5450 lm x 2	4800 lm x 2	120 lm/W	B-50 / Z-50	50,5 kg
2106032/3/...²	CUT-II-5 LED 36	5 m	36 W x 2	40 W x 2	1000 mA	3500 K	5800 lm x 2	5100 lm x 2	128 lm/W	B-50 / Z-50	50,5 kg
2106032/4/...²	CUT-II-5 LED 36	5 m	36 W x 2	40 W x 2	1000 mA	4000 K	6150 lm x 2	5400 lm x 2	135 lm/W	B-50 / Z-50	50,5 kg

2106032/6/... ²	CUT-II-5 LED 36	5 m	36 W x 2	40 W x 2	1000 mA	5000 K	6150 lm x 2	5400 lm x 2	135 lm/W	B-50 / Z-50	50,5 kg
2106033/1/... ²	CUT-II-5 LED 48	5 m	48 W x 2	55 W x 2	700 mA	2700 K	8150 lm x 2	7150 lm x 2	130 lm/W	B-50 / Z-50	50,5 kg
2106033/3/... ²	CUT-II-5 LED 48	5 m	48 W x 2	55 W x 2	700 mA	3500 K	8650 lm x 2	7600 lm x 2	138 lm/W	B-50 / Z-50	50,5 kg
2106033/4/... ²	CUT-II-5 LED 48	5 m	48 W x 2	55 W x 2	700 mA	4000 K	9150 lm x 2	8050 lm x 2	146 lm/W	B-50 / Z-50	50,5 kg
2106033/6/... ²	CUT-II-5 LED 48	5 m	48 W x 2	55 W x 2	700 mA	5000 K	9150 lm x 2	8042 lm x 2	146 lm/W	B-50 / Z-50	50,5 kg
2106633/1/... ²	CUT-II-6 LED 48	6 m	48 W x 2	55 W x 2	700 mA	2700 K	8150 lm x 2	7150 lm x 2	130 lm/W	B-71, B-70 / Z-71, Z-70	70 kg
2106633/3/... ²	CUT-II-6 LED 48	6 m	48 W x 2	55 W x 2	700 mA	3500 K	8650 lm x 2	7600 lm x 2	138 lm/W	B-71, B-70 / Z-71, Z-70	70 kg
2106633/4/... ²	CUT-II-6 LED 48	6 m	48 W x 2	55 W x 2	700 mA	4000 K	9150 lm x 2	8050 lm x 2	146 lm/W	B-71, B-70 / Z-71, Z-70	70 kg
2106633/6/... ²	CUT-II-6 LED 48	6 m	48 W x 2	55 W x 2	700 mA	5000 K	9150 lm x 2	8042 lm x 2	146 lm/W	B-71, B-70 / Z-71, Z-70	70 kg
2106635/1/... ²	CUT-II-6 LED 72	6 m	72 W x 2	79 W x 2	1000 mA	2700 K	10900 lm x 2	9600 lm x 2	122 lm/W	B-71, B-70 / Z-71, Z-70	70 kg
2106635/3/... ²	CUT-II-6 LED 72	6 m	72 W x 2	79 W x 2	1000 mA	3500 K	11600 lm x 2	10200 lm x 2	129 lm/W	B-71, B-70 / Z-71, Z-70	70 kg
2106635/4/... ²	CUT-II-6 LED 72	6 m	72 W x 2	79 W x 2	1000 mA	4000 K	12300 lm x 2	10800 lm x 2	137 lm/W	B-71, B-70 / Z-71, Z-70	70 kg
2106635/6/... ²	CUT-II-6 LED 72	6 m	72 W x 2	79 W x 2	1000 mA	5000 K	12300 lm x 2	10800 lm x 2	137 lm/W	B-71, B-70 / Z-71, Z-70	70 kg
2106733/1/... ²	CUT-II-7 LED 48	7 m	48 W x 2	55 W x 2	700 mA	2700 K	8150 lm x 2	7150 lm x 2	130 lm/W	B-71, B-70 / Z-71, Z-70	77 kg
2106733/3/... ²	CUT-II-7 LED 48	7 m	48 W x 2	55 W x 2	700 mA	3500 K	8650 lm x 2	7600 lm x 2	138 lm/W	B-71, B-70 / Z-71, Z-70	77 kg
2106733/4/... ²	CUT-II-7 LED 48	7 m	48 W x 2	55 W x 2	700 mA	4000 K	9150 lm x 2	8050 lm x 2	146 lm/W	B-71, B-70 / Z-71, Z-70	77 kg
2106733/6/... ²	CUT-II-7 LED 48	7 m	48 W x 2	55 W x 2	700 mA	5000 K	9150 lm x 2	8042 lm x 2	146 lm/W	B-71, B-70 / Z-71, Z-70	77 kg
2106735/1/... ²	CUT-II-7 LED 72	7 m	72 W x 2	79 W x 2	1000 mA	2700 K	10900 lm x 2	9600 lm x 2	122 lm/W	B-71, B-70 / Z-71, Z-70	77 kg
2106735/3/... ²	CUT-II-7 LED 72	7 m	72 W x 2	79 W x 2	1000 mA	3500 K	11600 lm x 2	10200 lm x 2	129 lm/W	B-71, B-70 / Z-71, Z-70	77 kg
2106735/4/... ²	CUT-II-7 LED 72	7 m	72 W x 2	79 W x 2	1000 mA	4000 K	12300 lm x 2	10800 lm x 2	137 lm/W	B-71, B-70 / Z-71, Z-70	77 kg
2106735/6/... ²	CUT-II-7 LED 72	7 m	72 W x 2	79 W x 2	1000 mA	5000 K	12300 lm x 2	10800 lm x 2	137 lm/W	B-71, B-70 / Z-71, Z-70	77 kg
2106433/1/... ²	CUT-II-8 LED 48	8 m	48 W x 2	55 W x 2	700 mA	2700 K	8150 lm x 2	7150 lm x 2	130 lm/W	B-71, B-70 / Z-71, Z-70	83,5 kg
2106433/3/... ²	CUT-II-8 LED 48	8 m	48 W x 2	55 W x 2	700 mA	3500 K	8650 lm x 2	7600 lm x 2	138 lm/W	B-71, B-70 / Z-71, Z-70	83,5 kg
2106433/4/... ²	CUT-II-8 LED 48	8 m	48 W x 2	55 W x 2	700 mA	4000 K	9150 lm x 2	8050 lm x 2	146 lm/W	B-71, B-70 / Z-71, Z-70	83,5 kg
2106433/6/... ²	CUT-II-8 LED 48	8 m	48 W x 2	55 W x 2	700 mA	5000 K	9150 lm x 2	8042 lm x 2	146 lm/W	B-71, B-70 / Z-71, Z-70	83,5 kg
2106435/1/... ²	CUT-II-8 LED 72	8 m	72 W x 2	79 W x 2	1000 mA	2700 K	10900 lm x 2	9600 lm x 2	122 lm/W	B-71, B-70 / Z-71, Z-70	83,5 kg
2106435/3/... ²	CUT-II-8 LED 72	8 m	72 W x 2	79 W x 2	1000 mA	3500 K	11600 lm x 2	10200 lm x 2	129 lm/W	B-71, B-70 / Z-71, Z-70	83,5 kg
2106435/4/... ²	CUT-II-8 LED 72	8 m	72 W x 2	79 W x 2	1000 mA	4000 K	12300 lm x 2	10800 lm x 2	137 lm/W	B-71, B-70 / Z-71, Z-70	83,5 kg
2106435/6/... ²	CUT-II-8 LED 72	8 m	72 W x 2	79 W x 2	1000 mA	5000 K	12300 lm x 2	10800 lm x 2	137 lm/W	B-71, B-70 / Z-71, Z-70	83,5 kg

1) tolerance +/- 5% due to LEDs accuracy

2) symbol of chosen optical system eg. 2106330/6/T2 is CUT-II-4 LED 24 5000 K with T2 optical system


DIRECTIVES AND STANDARDS

DIRECTIVES: 2014/35/UE (Official Journal of the UE L 96/357 29.03.2014), 2014/30/UE (Official Journal of the UE L 96/79 29.03.2014), 2011/65/UE RoHS (Official Journal of the UE L 174/88 01.07.2011), 2009/125/EC(Official Journal of the UE L 285/10 31.10.2009)


STANDARDS: PN-EN IEC 60598-1: 2021-7, PN-EN 60598-2-3: 2006, PN-EN 60529: 2003, PN-EN 62262: 2003, PN-EN 62471:2010, PN-EN 55015: 2019, PN-EN 61547: 2009, PN-EN 61000-3-2: 2019 , PN-EN 61000-3-3: 2014

Lighting parameters presented based on laboratory tests according to IESNA LM-79-19

TECHNICAL DRAWING

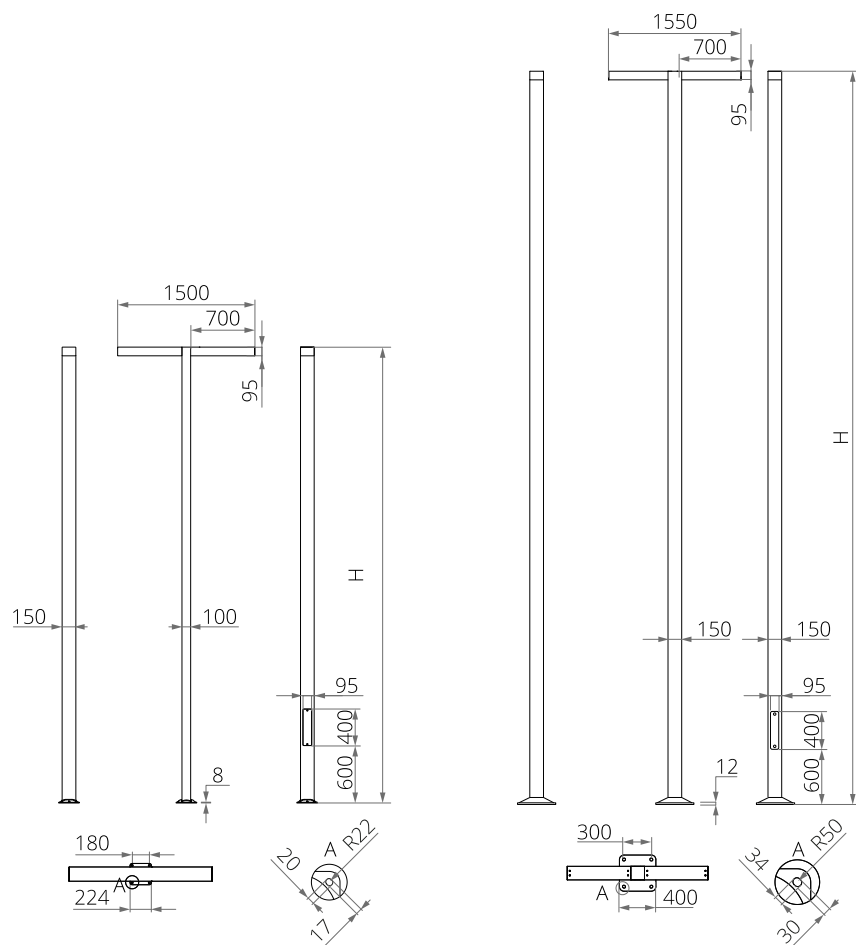

PHOTOMETRIC CURVES

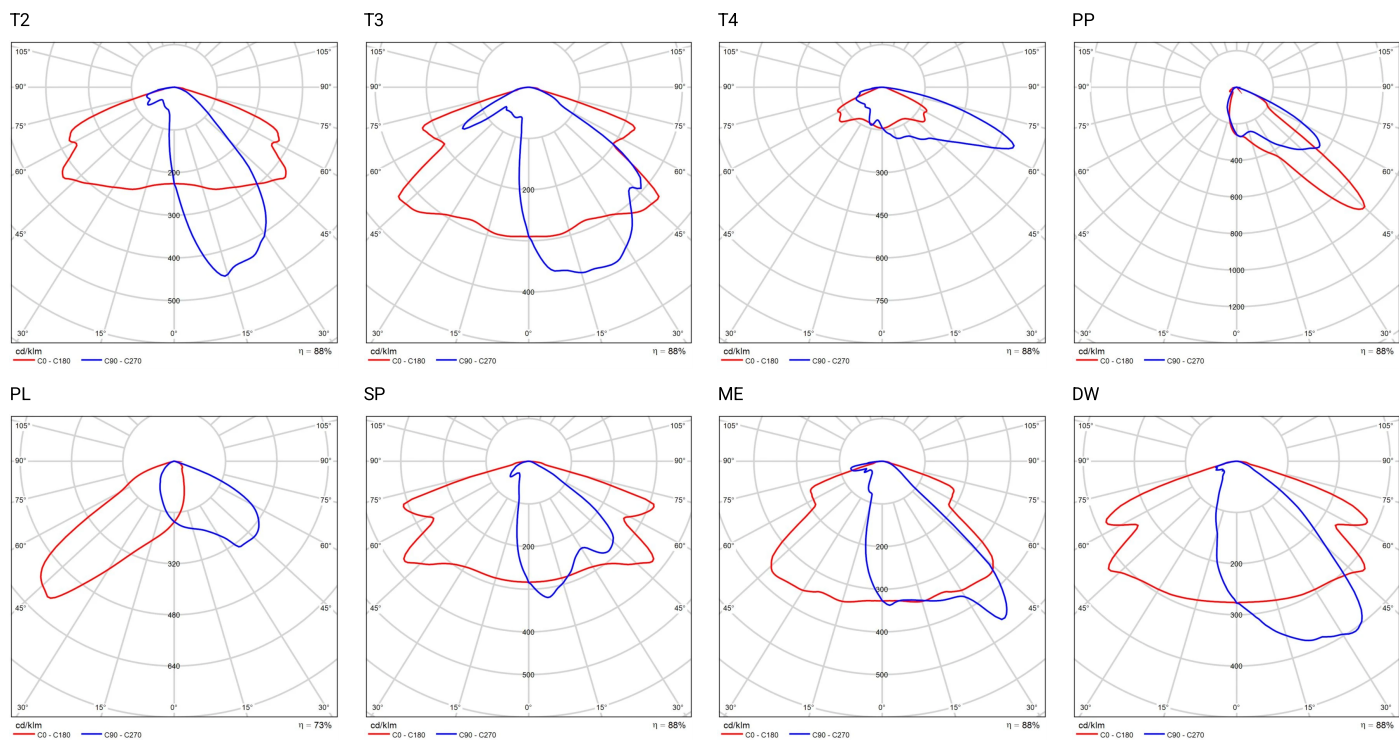

POWER SYSTEM FUNCTIONS

Luminaire in standard has following functions of intelligent power supply:

- Connection to outside control system by DALI interface (operation of analog signal 1-10V as an option),
- Possibility of programming multistage dimming of luminaire, up to 5 intervals in the range of from 10 to 100% of nominal power,
- LED module equipped with thermal protection implemented via an NTC thermistor,
- Regulation of power / luminous flux – the option of setting another value than the catalogue in the range of 30-100% of nominal one,

ACCECTABLE QUANTITY OF LUMINAIRES ON ONE CIRCUIT

Overcurrent switches MCB type B or C

Lighting sets	Type	2 A	4 A	6 A	10 A	16 A	20 A	25 A
CUT II LED 2x12 W, 2x36 W	B	1	3	5	8	13	16	20
	C	1	5	8	13	22	27	33
CUT II LED 2x48 W, 2x72 W	B	0	1	2	3	5	6	7
	C	0	2	3	5	8	10	13

Fuse – type gG and GL

Lighting sets	2 A	4 A	6 A	10 A	16 A	20 A	25 A
CUT II LED 2x12 W, 2x36 W	0	5	9	12	25	34	48
CUT II LED 2x48 W, 2x72 W	0	2	4	5	10	14	21

ACCEPTABLE HEIGHT

CUT II LED-4/5 Acceptable height of the LED lighting set

Field category	I zone Vref. = 22 m/s	I & III zone, up to 450 m a.s.l. Vref. = 24 m/s	II zone Vref. = 26 m/s	III zone up to 755 m a.s.l. Vref. = 28 m/s
I	6	5,5	5	4,5
II	6	5,5	5,5	5
III	6	6	5,5	5,5
IV	6	6	6	6

CUT II LED-6/7/8 Acceptable height of the LED lighting set

Field category	I zone Vref. = 22 m/s	I & III zone, up to 450 m a.s.l. Vref. = 24 m/s	II zone Vref. = 26 m/s	III zone up to 755 m a.s.l. Vref. = 28 m/s
I	7,5	7	6,5	6
II	8	7,5	7	6,5
III	8	8	7,5	7
IV	8	8	8	7,5