


Aluminium column SAL DL-10

120 mm at the base plate

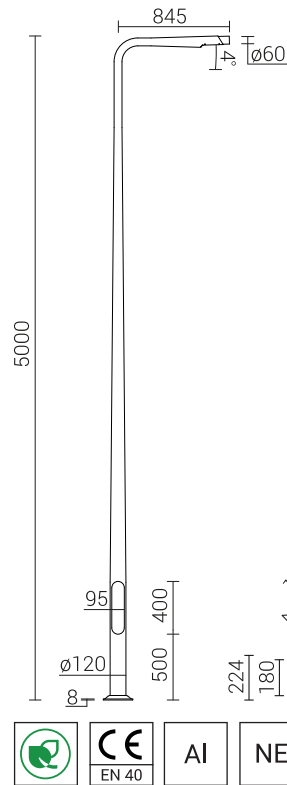

TECHNICAL DATA

Anodising	inox / black
Luminaire mounting	directly on the column, luminaires with mounting Ø60 mm with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet
Packing	sleeve material
Performance under vehicle impact (passive safety)	50-NE-B-S-SE-MD-0, 70-NE-B-S-SE-MD-0, 100-NE-B-S-SE-MD-0
Diameter at the base plate	120 mm
Finish	brushed anodised aluminium - anode coating thickness is 20µm as standard (coating thickness of 25µm is also possible), option of elastomer protection in column's colour up to a height of 350 mm (other height on customer's request) - the thickness of the protective coating ranges from 0.8 mm to 1.2 mm




TABLE OF VARIANTS

Code	Code	Symbol	Height of the column [H]	Wall thickness	Unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners	Net weight
42999	42999/C45/C35	SAL DL-10	5 m	4 mm	0.3 m³	B-50 / Z-50	311150 / 311205	4006	23 kg

STRENGTH TABLE

SAL DL-10		Dedicated luminaire			
code	Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s	
42999/C45/C35					
Dedicated luminaire	I zone, II Field category up to	I & III zone, II Field category up to 450m by s.I	II zone, II Field category up to	III zone, II Field category up to 755m by s.I	
ISKRA LED	OK	OK	OK	OK	
ISKRA LED P	OK	OK	OK	OK	

ANODISING COLOURS

