


Aluminium column SAL-6E

120 mm at the base plate

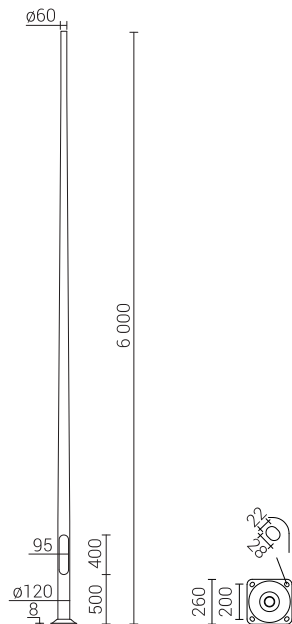

TECHNICAL DATA

Anodising	10 colours
Luminaire mounting	directly on the column, luminaires with mounting $\varnothing 60$ mm with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet
Extension arm type	according to resistance calculations
Packing	sleeve material
Performance under vehicle impact (passive safety)	50-NE-B-S-SE-MD-0, 70-NE-B-S-SE-MD-0, 100-NE-B-S-SE-MD-0
Diameter at the base plate	120 mm
Finish	brushed anodised aluminium - anode coating thickness is 20 μ m as standard (coating thickness of 25 μ m is also possible), option of elastomer protection up to a height of 350 mm, in a colour similar to the anode colour (other heights or colours of elastomer available according to the RAL palette at the customer's request) - the thickness of the protective coating ranges from 0.8 mm to 1.2 mm
Ingress protection	IP54 for wire chamber
Diameter of the column ending	$\varnothing 60$ mm




TABLE OF VARIANTS

Code	Symbol	Height of the column [H]	Wall thickness	Unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners	Net weight
42223/C...	SAL-6E	6 m	4 mm	0.174 m ³	B-51 / Z-51	311151 / 311251	4008	21 kg

STRENGTH TABLE

SAL-6E			Acceptable windage of single luminaire [m ²] for Cx=1			
code 42223			Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s
code of extension arm	type of extension arm	permissible weight of a single luminaire [kg]	zone I, terrain category II	zone I & III, terrain category II up to 450m a.s.l	zone II, terrain category II	zone III, terrain category II up to 755m a.s.l.
-	-	20	0,29	0,21	0,15	0,11
471040	WA-4	10	0,11	0,04	x	x
471051	WA-5/1	10	0,09	0,05	x	x
471141	WA-14/1	10	0,11	0,06	x	x
472041	WR-4/1/0,6/15	-	ISKRA LED			
472042	WR-4/2/0,6/15	-	ISKRA LED			
47204105	WR-4/1/0,5/5	-	ISKRA LED			
47204205	WR-4/2/0,5/5	-	ISKRA LED			
4720419	WR-4/1/0,6/15 ZP	-	ISKRA LED			
4720429	WR-4/2/0,6/15 ZP	-	ISKRA LED			
472041059	WR-4/1/0,5/5 ZP	-	ISKRA LED			
472042059	WR-4/2/0,5/5 ZP	-	ISKRA LED			
473010	WN-1	15	0,25	0,17	0,11	0,07
473020	WN-2	8	0,12	0,08	0,05	x

Aluminium column SAL-6E

120 mm at the base plate



ANODISING COLOURS

