

TECHNICAL DATA

Assembly	with 3 screws M6, after preparing mounting holes in the column
Application	aluminium columns with spigot endings Ø60 i Ø76 mm
Ingress protection	IP 44 lub IP65 (po zamontowaniu na słupie)
Material	PMMA (IP 44), HDPE (IP 65)
Input voltage frequency	50 - 60Hz

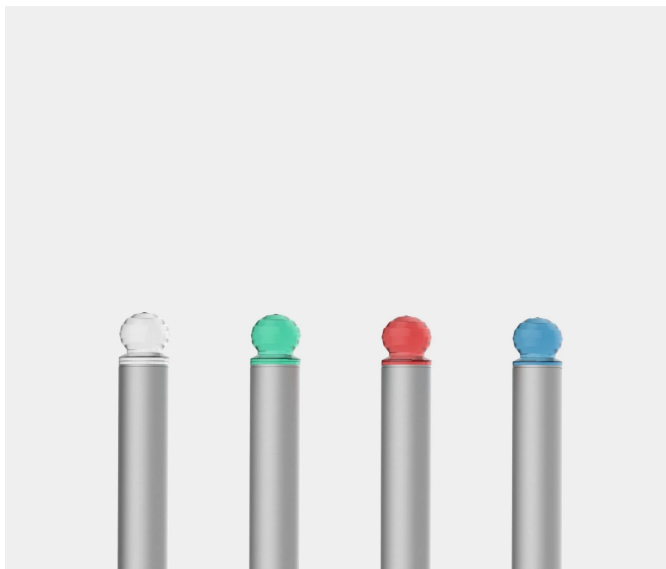


TABLE OF VARIANTS

Code	Symbol	LED power	Luminaire power consumption	Colour		Mounting diameter	Net weight
40490	Light ball fi 76-white IP 65	6 W	7 W	White	IP 65	76 mm	0,6 kg
40480	Light ball fi 76-red IP 65	6 W	7 W	Red	IP 65	76 mm	0,6 kg
40470	Light ball fi 76-green IP 65	6 W	7 W	Green	IP 65	76 mm	0,6 kg
40460	Light ball fi 76-blue IP 65	6 W	7 W	Blue	IP 65	76 mm	0,6 kg
4049	Light ball fi 76-white	1 W	1,2 W	White	IP 44	76 mm	0,6 kg
4048	Light ball fi 76-red	1 W	1,2 W	Red	IP 44	76 mm	0,6 kg
4047	Light ball fi 76-green	1 W	1,2 W	Green	IP 44	76 mm	0,6 kg
4046	Light ball fi 76-blue	1 W	1,2 W	Blue	IP 44	76 mm	0,6 kg
4033	Light ball fi 60-white	1 W	1,2 W	White	IP 44	60 mm	0,4 kg
4032	Light ball fi 60-red	1 W	1,2 W	Red	IP 44	60 mm	0,4 kg
4031	Light ball fi 60-green	1 W	1,2 W	Green	IP 44	60 mm	0,4 kg
4030	Light ball fi 60-blue	1 W	1,2 W	Blue	IP 44	60 mm	0,4 kg

