



## TECHNICAL DATA

<b>Assembly</b>	pole top mounted or on extension arms with ø 60 x 50 mm ending
<b>Application</b>	parks, pedestrians, bicycle routes
<b>Ingress protection</b>	IP 65
<b>Material</b>	base – high-pressure die-casted aluminium alloy cap – formed aluminium sheet diffuser – frosted cylindrical ø200 mm (PMMA)
<b>Unit volume</b>	0,06 m³
<b>Operating temperature range</b>	from -40°C to +40°C
<b>Expected useful lifetime</b>	L90B10 - 100 000 h
<b>CRI</b>	>70
<b>Inrush current</b>	24,6 A / 159,5 µs
<b>Input voltage frequency</b>	50/60Hz
<b>Power factor</b>	≥0.95
<b>Number of LED</b>	1
<b>Control system</b>	Luminaire can be connected to an external control system and / or sensors via socket compatible with Zhaga Book 18



## TABLE OF VARIANTS

Code	Symbol	LED power	Luminaire power consumption	LED forward current	Colour temperature (CCT)	LEDs luminous flux <sup>1</sup>	Luminaire luminous flux <sup>1</sup>	Luminous efficacy <sup>1</sup>	Net weight
2130550/1	ELBA LED D4i black	33 W	36 W	940 mA	2700 K	5300 lm	3650 lm	101 lm/W	5 kg
21310550/1/C45	ELBA LED D4i inox	33 W	36 W	940 mA	2700 K	5300 lm	3450 lm	96 lm/W	5 kg
2130550/3	ELBA LED D4i black	33 W	36 W	940 mA	3500 K	5750 lm	3950 lm	110 lm/W	5 kg
21310550/3/C45	ELBA LED D4i inox	33 W	36 W	940 mA	3500 K	5750 lm	3750 lm	104 lm/W	5 kg
2130550/4	ELBA LED D4i black	33 W	36 W	940 mA	4000 K	5850 lm	4000 lm	111 lm/W	5 kg
21310550/4/C45	ELBA LED D4i inox	33 W	36 W	940 mA	4000 K	5850 lm	3800 lm	106 lm/W	5 kg

1) tolerance +/- 5% due to LEDs accuracy

## DIRECTIVES AND STANDARDS

**DIRECTIVES:** 2014/35/UE (Official Journal of the UE L 96/357 29.03.2014), 2014/30/UE (Official Journal of the UE L 96/79 29.03.2014), 2011/65/UE RoHS (Official Journal of the UE L 174/88 01.07.2011), 2009/125/EC (Official Journal of the UE L 285/10 31.10.2009)

**STANDARDS:** PN-EN IEC 60598-1: 2021-7, PN-EN 60598-2-3: 2006, PN-EN 60529: 2003, PN-EN 62262: 2003, PN-EN 62471:2010, PN-EN 55015: 2019, PN-EN 61547: 2009, PN-EN 61000-3-2: 2019, PN-EN 61000-3-3: 2014, PN-EN 62722-2-1 (tq=25°C)


Lighting parameters presented based on laboratory tests according to IESNA LM-79-19

## REMOVING ELECTROSTATIC CHARGE FROM LED LUMINAIRE BODY


In order to efficient discharge the electrostatic charge from the housing of LED fitting installed on the pole from dielectric material (non-conductive) one of the following solutions is required:

- functional grounding
- LED luminaire with an additional protection device

## TECHNICAL DRAWING

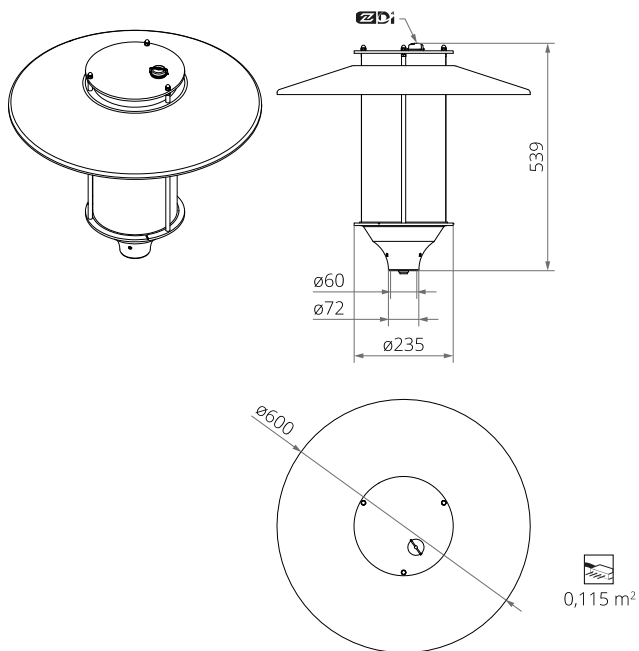

## PHOTOMETRIC CURVES

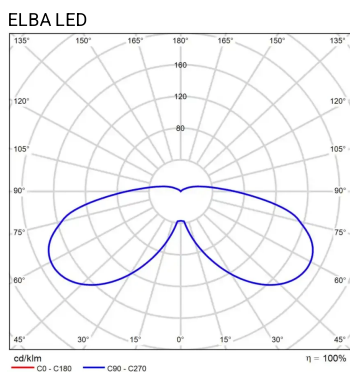

## POWER SYSTEM FUNCTIONS

**Luminaire in standard has following functions of intelligent power supply:**

- Possibility of programming multistage dimming of luminaire, up to 5 intervals in the range of from 10 to 100% of nominal power,
- Regulation of power / luminous flux – the option of setting another value than the catalogue in the range of 30-100% of nominal one,

## ACCEPTABLE QUANTITY OF LUMINAIRES ON ONE CIRCUIT

### Overcurrent switches MCB type B or C

Luminaire	Type	2 A	4 A	6 A	10 A	16 A	20 A	25 A
ELBA LED D4i	B	4	7	12	18	30	37	46
	C	4	12	18	31	51	62	78

### Fuse – type gG and GL

Luminaire	2 A	4 A	6 A	10 A	16 A	20 A	25 A
ELBA LED D4i	1	10	20	26	52	71	101

## CHROMATICITY

Chromaticity	x	y
2700 K	0.4338	0.4101
3500 K	0.4073	0.3917
4000 K	0.3818	0.3797

## PHOTOMETRIC CODE

2700 K	827/559
3500 K	835/559
4000 K	840/559