



# Aluminium column SAL-85K DZ

178 mm at the ground



## TECHNICAL DATA

<b>Anodising</b>	10 colours
<b>Luminaire mounting</b>	directly on the column, luminaires with mounting $\varnothing 60$ mm with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet
<b>Extension arm type</b>	according to resistance calculations
<b>Packing</b>	sleeve material
<b>Performance under vehicle impact (passive safety)</b>	50-NE-C-S-SE-MD-0, 70-NE-C-S-SE-MD-0, 100-NE-C-S-SE-MD-0
<b>Diameter at the base plate</b>	178 mm
<b>Finish</b>	brushed anodised aluminium - anode coating thickness is $20\mu\text{m}$ as standard (coating thickness of $25\mu\text{m}$ is also possible), option of elastomer protection up to a height of 350 mm, in a colour similar to the anode colour (other heights or colours of elastomer available according to the RAL palette at the customer's request) - the thickness of the protective coating ranges from 0.8 mm to 1.2 mm
<b>Ingress protection</b>	IP54 for wire chamber
<b>Diameter of the column ending</b>	$\varnothing 60 \times 180$ mm adapted to the installation of ROSA extension arms (with the effect of a facing head) and ROSA luminaires (according to the assembly parameter included in the luminaire technical data sheet)

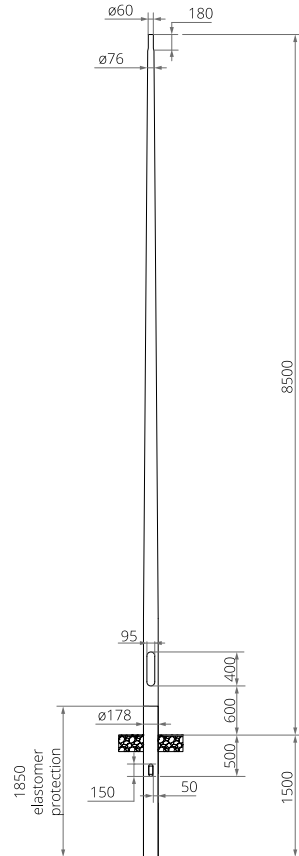

## TABLE OF VARIANTS

Code	Symbol	Height of the column [H]	Wall thickness	Unit volume	Net weight
42607/C...	SAL-85K dz	8.5 m	3.5 mm	0.133 m <sup>3</sup>	45.1 kg

## STRENGTH TABLE

SAL-85K dz		Acceptable windage of single luminaire [m <sup>2</sup> ] for Cx=1				
code 42607		Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s	
code of extension arm	type of extension arm	permissible weight of a single luminaire [kg]	zone I, terrain category II	zone I & III, terrain category II up to 450m a.s.l	zone II, terrain category II	zone III, terrain category II up to 755m a.s.l.
-	-	30	0,51	0,40	0,30	0,25
472021	WR-2/1/0,95/5	15	0,29	0,21	0,15	0,11
472022	WR-2/2/0,95/5	12	0,15	0,10	0,05	x
472023	WR-2/3/0,95/5	10	0,11	0,07	x	x
472041	WR-4/1/0,6/15	15	0,37	0,27	0,20	0,16
472042	WR-4/2/0,6/15	12	0,19	0,14	0,09	0,07
47204105	WR-4/1/0,5/5	15	0,39	0,30	0,22	0,17
47204205	WR-4/2/0,5/5	12	0,20	0,15	0,10	0,08
47204110	WR-4/1/1,0/5	15	0,31	0,23	0,16	0,12
47204210	WR-4/2/1,0/5	12	0,16	0,11	0,07	x
4720419	WR-4/1/0,6/15 ZP	15	0,37	0,27	0,20	0,16
4720429	WR-4/2/0,6/15 ZP	12	0,19	0,14	0,09	0,07
472041059	WR-4/1/0,5/5 ZP	15	0,39	0,30	0,22	0,17
472042059	WR-4/2/0,5/5 ZP	12	0,20	0,15	0,10	0,08
472041109	WR-4/1/1,0/5 ZP	15	0,31	0,23	0,16	0,12
472042109	WR-4/2/1,0/5 ZP	12	0,16	0,11	0,07	x
472041159	WR-4/1/1,5/5 ZP	15	0,24	0,17	0,11	0,07

# Aluminium column SAL-85K DZ

178 mm at the ground



SAL-85K dz			Acceptable windage of single luminaire [m²] for Cx=1			
code 42607			Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s
code of extension arm	type of extension arm	permissible weight of a single luminaire [kg]	zone I, terrain category II	zone I & III, terrain category II up to 450m a.s.l	zone II, terrain category II	zone III, terrain category II up to 755m a.s.l.
472042159	WR-4/2/1,5/5 ZP	12	0,13	0,07	x	x
472831	WR-8B/1/0,35/0	15	0,36	0,27	0,19	0,15
472841	WR-8B/1/0,35/5	15	0,36	0,27	0,19	0,15
472851	WR-8B/1/0,35/10	15	0,36	0,27	0,20	0,15
472151	WR-15/1/1,0/5	15	0,26	0,18	0,11	0,07
472152	WR-15/2/1,0/5	12	0,13	0,07	x	x
472211	WR-21/1/1,5/0	15	0,16	0,09	x	x
472212	WR-21/2/1,5/0	12	0,07	x	x	x
472101	WR-T1/1,5/5	15	0,18	0,11	0,05	x
472102	WR-T2/1,5/5	12	0,06	x	x	x
47219111	WRP 1/1,0/0,7/5	15	0,26	0,18	0,12	0,08
47219121	WRP 1/1,5/0,7/5	15	0,21	0,13	0,08	0,04
47219211	WRP 2/1,0/0,7/5	12	0,13	0,08	x	x
47219221	WRP 2/1,5/0,7/5	12	0,09	x	x	x
473010	WN-1	15	0,51	0,39	0,29	0,23
473020	WN-2	12	0,23	0,18	0,13	0,10
473030	WN-3	10	0,17	0,13	0,09	0,07
473210	WN-21	12	0,19	0,14	0,09	0,06
473211	WN-21 REG	12	0,15	0,10	0,06	x

## ANODISING COLOURS

