



TECHNICAL DATA

Assembly	A - for mounting on a column with a diameter of ø60; B - universal handle for mounting on a column with a diameter of ø76-100
Application	pedestrian crossings
Ingress protection	IP 65
Material	anodised aluminium alloy
Operating temperature range	from -30°C to +55°C
Battery type	LiFePO 32 Wh
Communication	Wireless communication 2,4 GHz, range to 300 m
Programmable activation time of the flashing light	10, 13, 16, 19, 22, 25, 28, 31, 34, 37s
Dimensions	205 x 140 x 287 mm
Battery energy storage	cells LiFePO4, 12,8V 2,5Ah 32Wh
Maximum electric power	30 W
Built-in battery charging power	15 W
	-




Code	Symbol	Battery type	Number of lamps	Handle type	Net weight
219801/B/C...	Signal lights set SAL PP M0200 AKU	LiFePO 32 Wh	1	B	4.8 kg

C... - selected anodizing colour

SYSTEM DESCRIPTION

The signaling lamp is designed to be installed at pedestrian crossings. The blinking lamp warns vehicle drivers about the presence of pedestrians in the crossing. Activation can take place via a button installed on the column, or by means of a motion sensor detecting the presence of pedestrians. All lamps assigned to the same group, i.e. located on the same doorway, are switched on. Control within one passage is carried out based on wireless communication - thus eliminating the need to connect the systems on different sides of the road with control wires. Thanks to the use of a buffer power supply system with a battery energy storage, the system works around the clock also in circuits where the power is disconnected during the day - the buffer power supply system at night collects energy that is used during the day.

SYSTEM OPERATING MODES

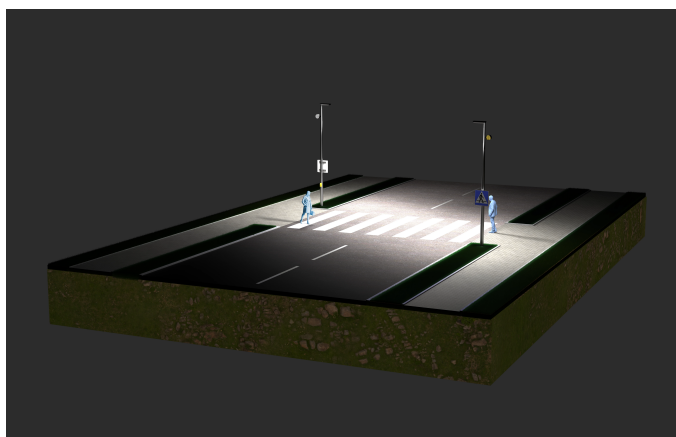

Night mode

The Safe Crosswalk Lighting System is powered from the AC network. Activating the button by a pedestrian turns on the warning lamps for a specified period of time and increases the lighting power of street luminaires equipped with the "Line Switch" function. In night mode, the battery is charged and powers the system in day mode.


Day mode

The AC power source is turned off. The Safe Crosswalk Lighting System is powered by a rechargeable battery. Activating the button by a pedestrian turns on the warning lamps for a specified period of time. The power buffer circuit becomes disconnected when the packet voltage reaches the configured trip threshold.




Comparison of pedestrian crossings before and after modernization

A photograph illustrating the difference in safety and visibility.

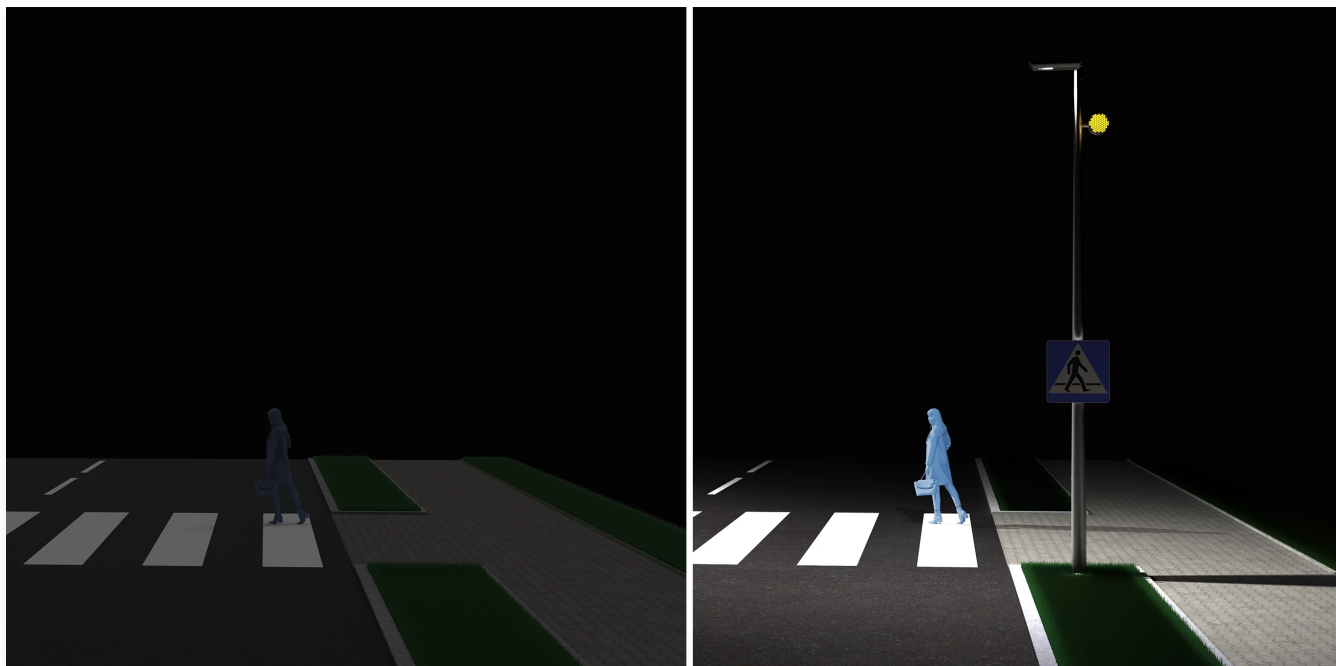

Dane Techniczne

SAL PP M0200 technical drawings.

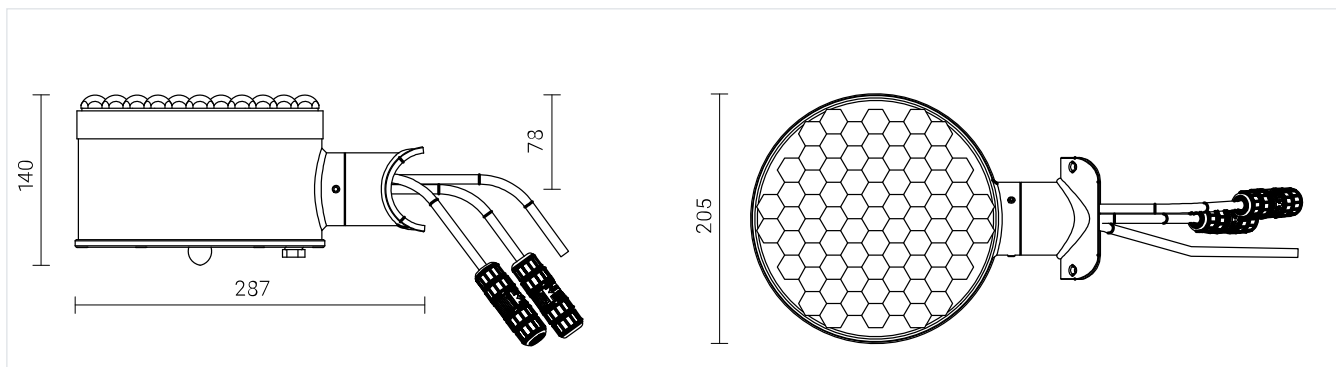

In a typical version of the product, the cable lengths are as follows: power cord 5 m; signal cable for pedestrian button 5 m; 2.5m lamp power cord. The standard lengths allow the system to be mounted on the SAL DL -10 pole.



If it is necessary to use cables of a different length, please contact the Sales Department of the ROSA company.

The mounting element of the set is the A or B handle (depending on the type of column):

Uchwyt A lub B (w zależności od rodzaju słupa):

Handle A

a handle for mounting on a column with a diameter of $\varnothing 60$ using screws ST6,3x19 (recommended installation on the SAL DL-10 column)

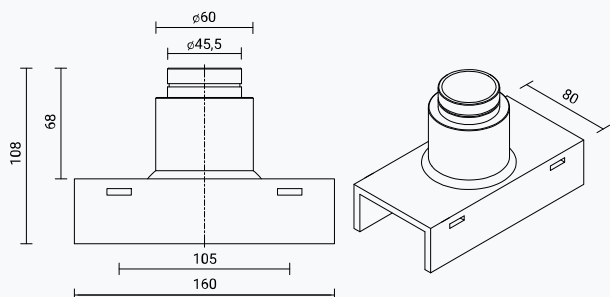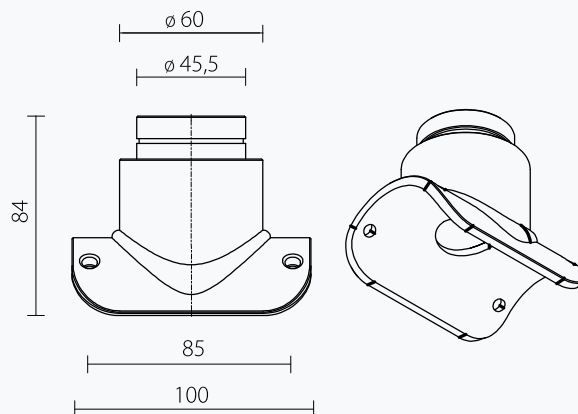


Handle B

universal handle for mounting on a column with a diameter of $\varnothing 76-100$ with the use of clamps


RELATED PRODUCTS



CUDDLE MINI LED REG



SAL-5



**Signal requesting
device Easyguide**

Code: 219700

SIGNAL LIGHTS SET SAL PP M0200 AKU



DIRECTIVES: 2014/35/UE (Official Journal of the UE L 96/357 29.03.2014), 2014/30/UE (Official Journal of the UE L 96/79 29.03.2014), 2011/65/UE RoHS (Official Journal of the UE L 174/88 01.07.2011), 2009/125/EC(Official Journal of the UE L 285/10 31.10.2009)

STANDARDS: EN 12352:2010