



# Aluminium column SAL-80

146 mm at the base plate

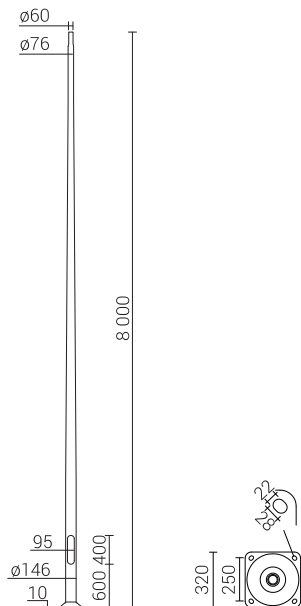

## TECHNICAL DATA

<b>Anodising</b>	10 colours
<b>Luminaire mounting</b>	directly on the column, luminaires with mounting ø60 mm with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet
<b>Extension arm type</b>	according to resistance calculations
<b>Packing</b>	sleeve material
<b>Performance under vehicle impact (passive safety)</b>	50-NE-B-S-SE-MD-0, 70-NE-B-S-SE-MD-0, 100-NE-B-S-SE-MD-0
<b>Diameter at the base plate</b>	146 mm
<b>Finish</b>	brushed anodised aluminium - anode coating thickness is 20µm as standard (coating thickness of 25µm is also possible), option of elastomer protection up to a height of 350 mm, in a colour similar to the anode colour (other heights or colours of elastomer available according to the RAL palette at the customer's request) - the thickness of the protective coating ranges from 0.8 mm to 1.2 mm
<b>Ingress protection</b>	IP54 for wire chamber
<b>Diameter of the column ending</b>	ø60 x 180 mm adapted to the installation of ROSA extension arms (with the effect of a facing head) and ROSA luminaires (according to the assembly parameter included in the luminaire technical data sheet)



## TABLE OF VARIANTS

Code	Symbol	Height of the column [H]	Wall thickness	Unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners	Net weight
42317/C...	SAL-80	8 m	4.2 mm	0.353 m³	B-60 / Z-60	311160 / 311206	4008	36.4 kg

## STRENGTH TABLE

SAL-80		Acceptable windage of single luminaire[m²] for Cx=1							
code 42317		Vref. = 22 m/s		Vref. = 24 m/s		Vref. = 26 m/s		Vref. = 28 m/s	
code of extension arm	type of extension arm	permissible weight of a single luminaire [kg]	zone I, terrain category II	zone I & III, terrain category II up to 450m a.s.l	zone II, terrain category II	zone III, terrain category II up to 755m a.s.l.			
-	-	30	0,25	0,17	0,11	0,07			
471141	WA-14/1	10	0,15	0,06	x	x			
472041	WR-4/1/0,6/15	15	0,21	0,12	0,06	x			
472042	WR-4/2/0,6/15	15	0,06	x	x	x			
47204105	WR-4/1/0,5/5	15	0,22	0,14	0,07	x			
47204205	WR-4/2/0,5/5	15	0,07	x	x	x			
4720419	WR-4/1/0,6/15 ZP	15	0,21	0,12	0,06	x			
4720429	WR-4/2/0,6/15 ZP	15	0,06	x	x	x			
472041059	WR-4/1/0,5/5 ZP	15	0,22	0,14	0,07	x			
472042059	WR-4/2/0,5/5 ZP	15	0,07	x	x	x			
473010	WN-1	15	0,24	0,15	0,08	0,05			

# Aluminium column SAL-80

146 mm at the base plate



## ANODISING COLOURS

