




# Aluminium column SAL-60CAM

146 mm at the base plate



## TECHNICAL DATA

<b>Anodising</b>	10 colours
<b>Packing</b>	sleeve material
<b>Diameter at the base plate</b>	146 mm
<b>Purpose</b>	for mounting surveillance cameras
<b>Finish</b>	brushed anodised aluminium - anode coating thickness is 20µm as standard (coating thickness of 25µm is also possible), option of elastomer protection up to a height of 350 mm, in a colour similar to the anode colour (other heights or colours of elastomer available according to the RAL palette at the customer's request) - the thickness of the protective coating ranges from 0.8 mm to 1.2 mm
<b>Ingress protection</b>	IP54 for wire chamber
<b>Max. bending moment</b>	5000 Nm
<b>Maximum permissible load</b>	30 kg
<b>Ending</b>	aluminum cap anodized in the color of the columns included
<b>Diameter of the column ending</b>	ø76 mm

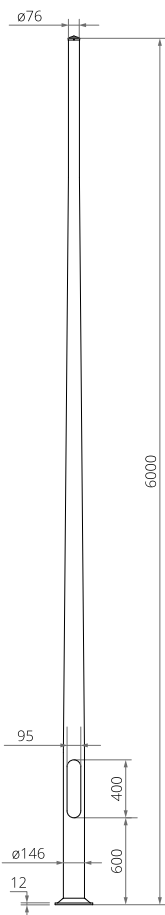

## TABLE OF VARIANTS

Code	Symbol	Height H [mm]	Height of the column [H]	Wall thickness	Unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners	Net weight
42844/C...	SAL-60CAM	-	6 m	4 mm	0.186 m³	B-51 / Z-51	311151 / 311251	4008	25.2 kg

## ANODISING COLOURS

