

TECHNICAL DATA


Power	70 W
Application	parks, pedestrians
Assembly	on columns, extension arms, wall brackets, anodised aluminium brackets with ø60x45 mm ending
Colour	black
Ingress protection	IP 65
Material	base - poliamide control gear cover - polycarbonate
Input voltage frequency	50 Hz
Supply voltage	230V AC
Electrical gear cover	mounted on gear frame, magnetic ballast with thermal protection, metal halide lamps MH 70W (EL) optionally available with electronic ballast
Mounting method	upwards or downwards
Light source type	sodium E-27
Type of luminaires	-

Code	Symbol	Luminaire power consumption	Unit volume	Effective projected area	Light source type	Lamp diffuser neck	Type of diffuser	Net weight
210102	OP S-70W/400	92 W	0.01 m³	0.14 m²	sodium E-27	180 mm	Sphere 400	2.4 kg

: 2014/35/UE (Official Journal of the UE L 96/357 29.03.2014), 2014/30/UE (Official Journal of the UE L 96/79 29.03.2014), 2011/65/UE RoHS (Official Journal of the UE L 174/88 01.07.2011), 2009/125/EC(Official Journal of the UE L 285/10 31.10.2009)
: PN-EN IEC 60598-1: 2021-7, PN-EN 60598-2-3: 2006, PN-EN 60529: 2003, PN-EN 62262: 2003, PN-EN 62471:2010, PN-EN 55015: 2019, PN-EN 61547: 2009, PN-EN 61000-3-2: 2019 , PN-EN 61000-3-3: 2014

Lighting parameters presented based on laboratory tests according to IESNA LM-79-19

TECHNICAL DRAWING

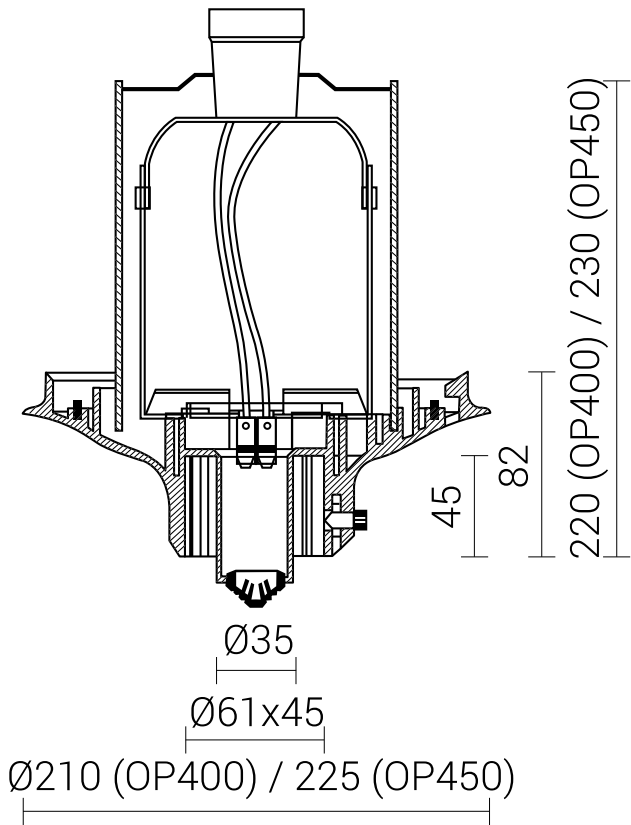

OP S-70W/400



OP S-70 W/400

