



TECHNICAL DATA

Application	residential roads (internal), parks, pedestrians
Colour	graphite / inox
Ingress protection	IP 66
Optical system	PMMA optics
Material	anodised aluminium alloy
Expected useful lifetime	L90B10 - 100 000 h
CRI	>70
Input voltage frequency	50/60Hz
Power factor	≥0.95
Number of LED	16
Control system	LED lighting set has the possibility to connect to an external control system via DALI interface (optionally via analog signal 1-10V).
Concrete footing / reinforcement basket	B-50 (311150) / Z-50 (311205)



TABLE OF VARIANTS

Code	Symbol	Height of the column [H]	LED power	Luminaire power consumption	LED forward current	Colour temperature (CCT)	LEDs luminous flux¹	Luminaire luminous flux¹	Luminous efficacy¹	Unit volume	Inrush current	Net weight
215032/1/...²	DROP I LED 36	5.2 m	36 W	41 W	750 mA	2700 K	5750 lm	5450 lm	133 lm/W	1 m³	18A / 280µs	25.9 kg
215032/3/...²	DROP I LED 36	5.2 m	36 W	41 W	750 mA	3500 K	6100 lm	5800 lm	141 lm/W	1 m³	18A / 280µs	25.9 kg
215032/4/...²	DROP I LED 36	5.2 m	36 W	41 W	750 mA	4000 K	6450 lm	6100 lm	149 lm/W	1 m³	18A / 280µs	25.9 kg
215032/6/...²	DROP I LED 36	5.2 m	36 W	41 W	750 mA	5000 K	6450 lm	6100 lm	149 lm/W	1 m³	18A / 280µs	25.9 kg
215033/1/...²	DROP I LED 48	5.2 m	48 W	55 W	1000 mA	2700 K	7250 lm	6850 lm	125 lm/W	1 m³	46A / 250µs	25.9 kg
215033/3/...²	DROP I LED 48	5.2 m	48 W	55 W	1000 mA	3500 K	7650 lm	7300 lm	133 lm/W	1 m³	46A / 250µs	25.9 kg
215033/4/...²	DROP I LED 48	5.2 m	48 W	55 W	1000 mA	4000 K	8150 lm	7700 lm	140 lm/W	1 m³	46A / 250µs	25.9 kg
215033/6/...²	DROP I LED 48	5.2 m	48 W	55 W	1000 mA	5000 K	8150 lm	7700 lm	140 lm/W	1 m³	46A / 250µs	25.9 kg

1) tolerance +/- 5% due to LEDs accuracy

2) symbol of chosen optical system eg. 215033/6/A is DROP I LED 48 5000K with asymmetric optical system


DIRECTIVES AND STANDARDS

DIRECTIVES: 2014/35/UE (Official Journal of the UE L 96/357 29.03.2014), 2014/30/UE (Official Journal of the UE L 96/79 29.03.2014), 2011/65/UE RoHS (Official Journal of the UE L 174/88 01.07.2011), 2009/125/EC(Official Journal of the UE L 285/10 31.10.2009)


STANDARDS: PN-EN IEC 60598-1: 2021-7, PN-EN 60598-2-3: 2006, PN-EN 60529: 2003, PN-EN 62262: 2003, PN-EN 62471:2010, PN-EN 55015: 2019, PN-EN 61547: 2009, PN-EN 61000-3-2: 2019, PN-EN 61000-3-3: 2014

Lighting parameters presented based on laboratory tests according to IESNA LM-79-19

TECHNICAL DRAWING

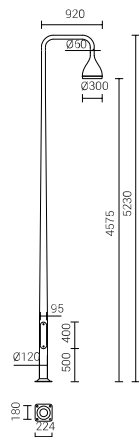

PHOTOMETRIC CURVES

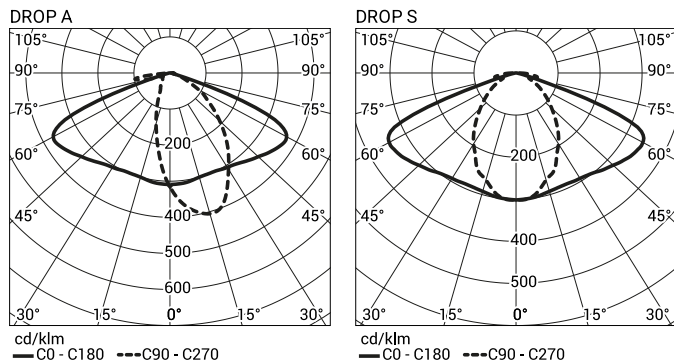

POWER SYSTEM FUNCTIONS

Luminaire in standard has following functions of intelligent power supply:

- Connection to outside control system by DALI interface (operation of analog signal 1-10V as an option),
- Possibility of programming multistage dimming of luminaire, up to 5 intervals in the range of from 10 to 100% of nominal power,
- LED module equipped with thermal protection implemented via an NTC thermistor,
- Regulation of power / luminous flux – the option of setting another value than the catalogue in the range of 30-100% of nominal one,

ACCECTABLE QUANTITY OF LUMINAIRES ON ONE CIRCUIT

Overcurrent switches MCB type B or C

Lighting sets	Typ	2A	4A	6A	10A	16A	20A	25A
DROP I LED 36W	B	3	6	10	16	26	32	40
	C	3	10	16	27	44	54	67
DROP I LED 48W	B	1	2	4	6	10	12	15
	C	1	4	6	10	17	20	26

Fuse – type gG and GL

Lighting sets	2A	4A	6A	10A	16A	20A	25A
DROP I LED 36W	1	10	19	25	50	68	97
DROP I LED 48W	0	4	8	11	22	31	44

ACCEPTABLE HEIGHT

DROP I LED				
Acceptable height of the LED lighting set				
Field category	I zone Vref. = 22 m/s	I & III zone, up to 450m a.s.l. Vref. = 24 m/s	II zone Vref. = 26 m/s	III zone up to 755m a.s.l. Vref. = 28 m/s
I	5,2	5,2	5,2	5,2
II	5,2	5,2	5,2	5,2
III	5,2	5,2	5,2	5,2
IV	5,2	5,2	5,2	5,2