

Aluminium column SAL-60/P

146 mm at the base plate



TECHNICAL DATA

Anodising	10 colours
Luminaire mounting	directly on the column, luminaires with mounting $\varnothing 60$ mm with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet
Extension arm type	according to resistance calculations
Packing	sleeve material
Diameter at the base plate	146 mm
Finish	brushed anodised aluminium - anode coating thickness is $20\mu\text{m}$ as standard (coating thickness of $25\mu\text{m}$ is also possible), option of elastomer protection up to a height of 350 mm, in a colour similar to the anode colour (other heights or colours of elastomer available according to the RAL palette at the customer's request) - the thickness of the protective coating ranges from 0.8 mm to 1.2 mm

Diameter of the column ending $\varnothing 60$ mm

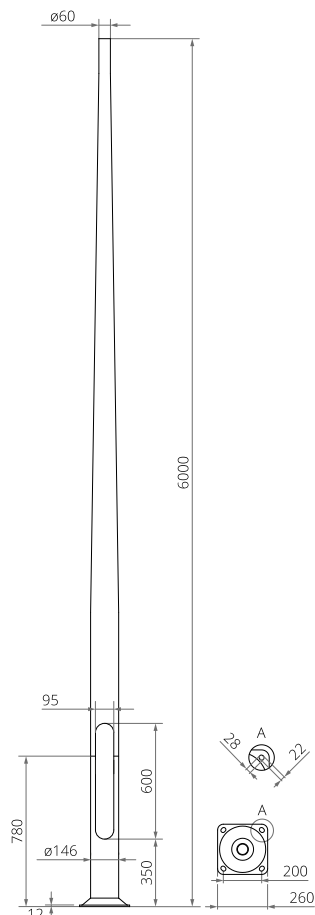



TABLE OF VARIANTS

Code	Symbol	Height of the column [H]	Wall thickness	Unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners	Net weight
42925/C...	SAL-60/P	6 m	3.5 mm	0.174 m ³	B-51 / Z-51	311151 / 311251	4008	32.8 kg

STRENGTH TABLE

Resistance calculations for 30 kg - expected max loading on height 2 m during lowering and raising in angle around 45°

SAL-60/P		Acceptable windage of single luminaire [m ²] for Cx=1			
code 42925		Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s
Extension arm type	Permissible weight of a single luminaire	I zone, II Field category up to	I & III zone, II Field category up to 450m by s.l	II zone, II Field category up to	III zone, II Field category up to 755m by s.l
-	6	0,82	0,69	0,56	0,48
WA-1	3,5	0,68	0,57	0,44	0,37

Aluminium column SAL-60/P

146 mm at the base plate



Resistance calculations for 50 kg - expected max loading on height 2 m during lowering and raising in angle around 45°.

SAL-60/P		Acceptable windage of single luminaire [m ²] for Cx=1			
code 42925		Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s
Extension arm type	Permissible weight of a single luminaire	I zone, II Field category up to	I & III zone, II Field category up to 450m by s.I	II zone, II Field category up to	III zone, II Field category up to 755m by s.I
-	15	0,76	0,64	0,52	0,44
WA-1	12,5	0,62	0,52	0,40	0,33
WA-4	8,5	0,51	0,41	0,30	0,23
WA-14/1	12	0,62	0,50	0,37	0,29
WR-4/1/0,6/15	12	0,66	0,55	0,43	0,36
WR-4/1/0,5/5	12	0,69	0,58	0,45	0,38
WR-4/1/0,6/15 ZP	12	0,66	0,55	0,43	0,36
WR-4/1/0,5/5 ZP	12	0,69	0,58	0,45	0,38
WN-1	14	0,70	0,59	0,46	0,39

COLUMN MANUAL



1. Removal of the wiring chamber cover



2. Unscrewing the hinge's bolts



3. Manually lowering the column

Aluminium column SAL-60/P

146 mm at the base plate



ANODISING COLOURS

