



Aluminium column SAL-60G

146 mm at the base plate

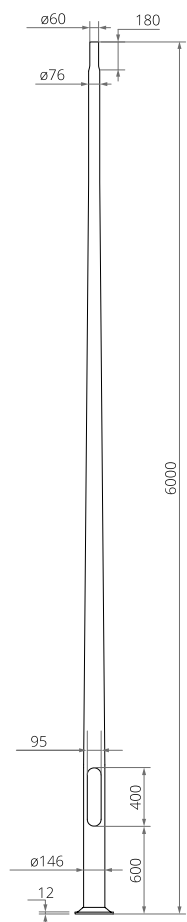

TECHNICAL DATA

Anodising	10 colours
Luminaire mounting	directly on the column, luminaires with mounting $\varnothing 60$ mm with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet
Extension arm type	according to resistance calculations
Packing	sleeve material
Performance under vehicle impact (passive safety)	50-NE-B-S-SE-MD-0, 70-NE-B-S-SE-MD-0, 100-NE-B-S-SE-MD-0
Diameter at the base plate	146 mm
Finish	brushed anodised aluminium - anode coating thickness is 20 μ m as standard (coating thickness of 25 μ m is also possible), option of elastomer protection up to a height of 350 mm, in a colour similar to the anode colour (other heights or colours of elastomer available according to the RAL palette at the customer's request) - the thickness of the protective coating ranges from 0.8 mm to 1.2 mm
Ingress protection	IP54 for wire chamber
Diameter of the column ending	$\varnothing 60 \times 180$ mm adapted to the installation of ROSA extension arms (with the effect of a facing head) and ROSA luminaires (according to the assembly parameter included in the luminaire technical data sheet)




TABLE OF VARIANTS

Code	Symbol	Height of the column [H]	Wall thickness	Unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners	Net weight
42343/C...	SAL-60G	6 m	4.2 mm	0.186 m ³	B-51 / Z-51	311151 / 311251	4008	25.5 kg

STRENGTH TABLE

SAL-60G		Acceptable windage of single luminaire[m ²] for Cx=1							
code 42343		Vref. = 22 m/s		Vref. = 24 m/s		Vref. = 26 m/s		Vref. = 28 m/s	
code of extension arm	type of extension arm	permissible weight of a single luminaire [kg]	zone I, terrain category II	zone I & III, terrain category I up to 450m a.s.l	zone II, terrain category II	zone III, terrain category II up to 755m a.s.l.			
-	-	30	0,68	0,55	0,44	0,37			
471141	WA-14/1	10	0,61	0,47	0,34	0,26			
471142	WA-14/2	8	0,23	0,16	0,10	0,06			
471201	WA-20/1	10	0,38	0,28	0,19	0,12			
471202	WA-20/2	8	0,09	x	x	x			
471031	WA-31 f42	10	0,34	0,24	0,16	0,09			
472021	WR-2/1/0,95/5	15	0,42	0,34	0,26	0,21			
472022	WR-2/2/0,95/5	15	0,22	0,16	0,11	0,07			
472041	WR-4/1/0,6/15	15	0,54	0,43	0,34	0,29			
472042	WR-4/2/0,6/15	15	0,27	0,20	0,15	0,11			
47204105	WR-4/1/0,5/5	15	0,58	0,47	0,37	0,31			
47204205	WR-4/2/0,5/5	15	0,28	0,22	0,16	0,13			
47204110	WR-4/1/1,0/5	15	0,44	0,35	0,27	0,22			
47204210	WR-4/2/1,0/5	15	0,24	0,18	0,12	0,09			
4720419	WR-4/1/0,6/15 ZP	15	0,54	0,43	0,34	0,29			

Aluminium column SAL-60G

146 mm at the base plate



SAL-60G			Acceptable windage of single luminaire[m²] for Cx=1			
code 42343			Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s
code of extension arm	type of extension arm	permissible weight of a single luminaire [kg]	zone I, terrain category II	zone I & III, terrain category II up to 450m a.s.l	zone II, terrain category II	zone III, terrain category II up to 755m a.s.l.
4720429	WR-4/2/0,6/15 ZP	15	0,27	0,20	0,15	0,11
472041059	WR-4/1/0,5/5 ZP	15	0,58	0,47	0,37	0,31
472042059	WR-4/2/0,5/5 ZP	15	0,28	0,22	0,16	0,13
472041109	WR-4/1/1,0/5 ZP	15	0,44	0,35	0,27	0,22
472042109	WR-4/2/1,0/5 ZP	15	0,24	0,18	0,12	0,09
472071	WR-7/1/0,5	15	0,63	0,50	0,38	0,31
472072	WR-7/2/0,5	15	0,26	0,20	0,15	0,11
472831	WR-8B/1/0,35/0	15	0,55	0,44	0,34	0,28
472841	WR-8B/1/0,35/5	15	0,55	0,44	0,34	0,28
472851	WR-8B/1/0,35/10	15	0,55	0,44	0,34	0,28
472221	WR-10/1/0,85/0	-		ISKRA LED		
472222	WR-10/2/0,85/0	-		ISKRA LED		
4722419	WR-10P/1/0,85/0 ZP	-		ISKRA LED		
4722429	WR-10P/2/0,85/0 ZP	-		ISKRA LED		
4722519	WR-10P/1/1,5/0 ZP	-		ISKRA LED		
472151	WR-15/1/1,0/5	15	0,41	0,31	0,24	0,19
472152	WR-15/2/1,0/5	15	0,21	0,14	0,09	0,05
472231	WR-23/1/0,76	15	0,46	0,35	0,26	0,19
472231/42	WR-23/1/0,76 fi42	15	0,46	0,35	0,26	0,19
472731	WR-73/1/0,5	15	0,59	0,46	0,35	0,28
47219111	WRP 1/1,0/0,7/5	15	0,39	0,30	0,23	0,18
47219211	WRP 2/1,0/0,7/5	10	0,21	0,15	0,10	0,06
473010	WN-1	15	0,68	0,54	0,42	0,35

ANODISING COLOURS

