

Aluminium column SAL-70/P

146 mm at the base plate



TECHNICAL DATA

Anodising	10 colours
Luminaire mounting	directly on the column, luminaires with mounting $\varnothing 60$ mm with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet
Extension arm type	according to resistance calculations
Packing	sleeve material
Diameter at the base plate	146 mm
Finish	brushed anodised aluminium - anode coating thickness is $20\mu\text{m}$ as standard (coating thickness of $25\mu\text{m}$ is also possible), option of elastomer protection up to a height of 350 mm, in a colour similar to the anode colour (other heights or colours of elastomer available according to the RAL palette at the customer's request) - the thickness of the protective coating ranges from 0.8 mm to 1.2 mm

Diameter of the column ending $\varnothing 60$ mm

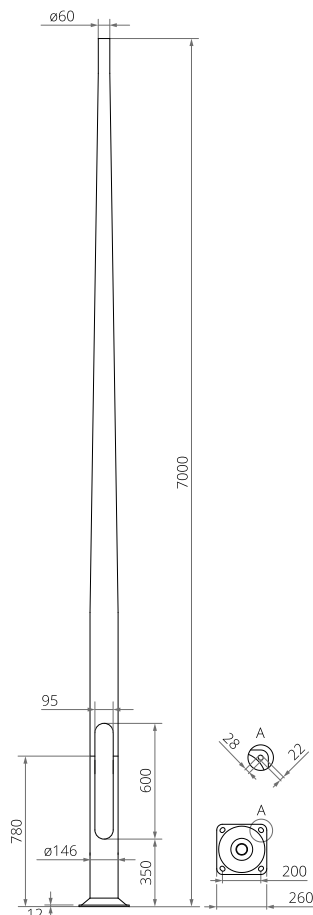



TABLE OF VARIANTS

Code	Symbol	Height of the column [H]	Wall thickness	Unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners	Net weight
42927/C...	SAL-70/P	7 m	4.2 mm	0.203 m ³	B-51 / Z-51	311151 / 311251	4008	36.5 kg

STRENGTH TABLE


Resistance calculations for 50 kg - expected max loading on height 2 m during lowering and raising in angle around 45°

SAL-70/P		Acceptable windage of single luminaire [m ²] for C _x =1				
code 42927		Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s	
code of extension arm	type of extension arm	permissible weight of a single luminaire [kg]	zone I, terrain category II	zone I & III, terrain category II up to 450m a.s.l.	zone II, terrain category II	zone III, terrain category II up to 755m a.s.l.
-	-	10	0,52	0,41	0,31	0,26
471040	WA-4	4	0,32	0,22	0,13	0,08
471141	WA-14/1	6,5	0,38	0,26	0,16	0,11
471041	WA-41 f142	4	0,34	0,24	0,15	0,10
472041	WR-4/1/0,6/15	7,5	0,44	0,33	0,24	0,18
47204105	WR-4/1/0,5/5	7,5	0,46	0,35	0,25	0,20
4720419	WR-4/1/0,6/15 ZP	7,5	0,44	0,33	0,24	0,18
472041059	WR-4/1/0,5/5 ZP	7,5	0,46	0,35	0,25	0,20
473010	WN-1	9	0,47	0,36	0,26	0,21

COLUMN MANUAL

Aluminium column SAL-70/P

146 mm at the base plate

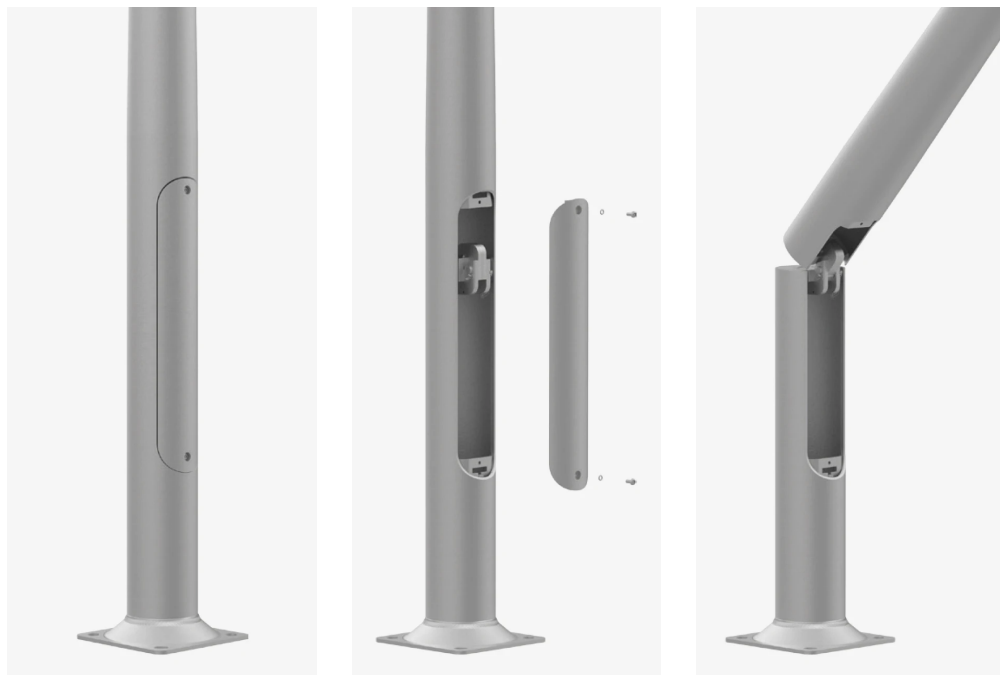

1. Removal of the wiring chamber cover

2. Unscrewing the hinge's bolts

3. Manually lowering the column

ANODISING COLOURS

