



TECHNICAL DATA

Application	surrounding office buildings, parks, pedestrians, parkings
Assembly	on extension arms, columns with extension arms with ø 60 x 50 mm ending
Ingress protection	IP 66
Optical system	PMMA optics, interchangeable LED module
Material	cap – formed aluminium sheet diffuser - tempered glass luminaire body - aluminum alloy, anodized
Unit volume	-
Operating temperature range	from -40°C to +40°C
Expected useful lifetime	L90B10 - 100 000 h
CRI	>80
Inrush current	24,6 A / 159,5 µs (RING LED D4i 24 - 36) 49 A / 290 µs (RING LED D4i 48 - 72)
Input voltage frequency	50/60Hz
Power factor	≥0.95
Number of LED	32
Control system	Luminaire can be connected to an external control system and / or sensors via socket compatible with Zhaga Book 18

Code	Symbol	LED power	Luminaire power consumption	LED forward current	Colour temperature (CCT)	LEDs luminous flux¹	Luminaire luminous flux¹	Luminous efficacy¹	Net weight
2121535/C/1/...²/C...	RING 2 LED D4i C 72	72 W	79 W	750 mA	2700 K	11520 lm	8750 lm	111 lm/W	7.7 kg

1) tolerance +/- 5% due to LEDs accuracy
2) exemplary product code 2121530/C/6/T4/C35 is RING 2 LED D4i C 24W 5000K luminaire, where /C/ is the mounting head type 'C', /T4/ is the T4 optical system, /C35 is the anodizing color of the C35 luminaire black

DIRECTIVES AND STANDARDS

DIRECTIVES: 2014/35/UE (Official Journal of the UE L 96/357 29.03.2014), 2014/30/UE (Official Journal of the UE L 96/79 29.03.2014), 2011/65/UE RoHS (Official Journal of the UE L 174/88 01.07.2011), 2009/125/EC(Official Journal of the UE L 285/10 31.10.2009)
STANDARDS: PN-EN IEC 60598-1: 2021-7, PN-EN 60598-2-3: 2006, PN-EN 60529: 2003, PN-EN 62262: 2003, PN-EN 62471:2010, PN-EN 55015: 2019, PN-EN 61547: 2009, PN-EN 61000-3-2: 2019 , PN-EN 61000-3-3: 2014, PN-EN 62722-2-1 (tq=25°C)

Lighting parameters presented based on laboratory tests according to IESNA LM-79-19

REMOVING ELECTROSTATIC CHARGE FROM LED LUMINAIRE BODY


In order to efficient discharge the electrostatic charge from the housing of LED fitting installed on the pole from dielectric material (non-conductive) one of the following solutions is required:
- functional grounding
- LED luminaire with an additional protection device

RING 2 LED D4i C 72




TECHNICAL DRAWING


RING 2 LED D4i C

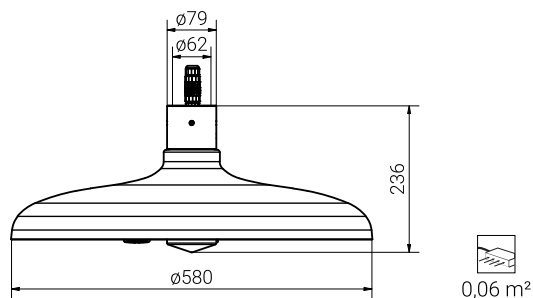

24-48 W

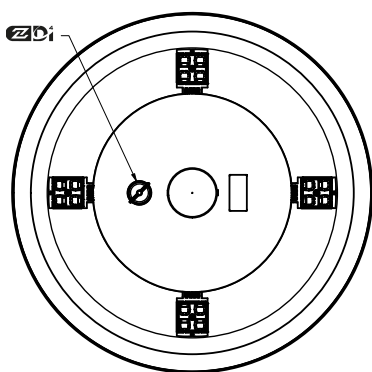


72 W

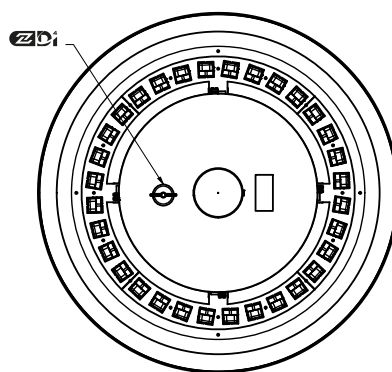


PHOTOMETRIC CURVES


T4 - RING LED D4i 24 - 48 W




T4 - RING LED D4i 72 W




VS - RING LED D4i 24 - 48 W



VS - RING LED D4i 72 W



SP - RING LED D4i 24 - 48 W



RING 2 LED D4I C 72



POWER SYSTEM FUNCTIONS

Luminaire in standard has following functions of intelligent power supply:

- Possibility of programming multistage dimming of luminaire, up to 5 intervals in the range of from 10 to 100% of nominal power,
- LED module equipped with thermal protection implemented via an NTC thermistor,
- Regulation of power / luminous flux – the option of setting another value than the catalogue in the range of 30-100% of nominal one,

ACCETABLE QUANTITY OF LUMINAIRES ON ONE CIRCUIT

Accetable quantity of luminaires RING 2 LED D4i C on one circuit, protected by:

Overcurrent switches MCB type B or C

RING 2 LED D4i C 24 W, 36 W	B	4	7	12	18	30	37	46
	C	4	12	18	31	51	62	78
RING 2 LED D4i C 48 W, 72 W	B	5	10	16	16	42	52	65
	C	5	17	16	26	71	87	109

Fuse – type gG and GL

Luminaire	2A	4A	6A	10A	16A	20A	25A
RING 2 LED D4i C 24 W, 36 W	1	10	20	26	52	71	101
RING 2 LED D4i C 48 W, 72 W	0	3	7	9	18	25	36

CHROMATICITY

Chromaticity	x	y
2700K	0,4582	0,4099
3500K	0,4080	0,3916
4000K	0,3825	0,3798
5000K	0,3451	0,3554

PHOTOMETRIC CODE

2700K	727/559
3500K	735/559
4000K	740/559
5000K	750/559